

LED Linear Light

(01 6ME Magnetic system G2)


- Easy install
- Modular design
- Linear style design
- Space lighting and directional lighting fusion




Applications

01 6 ME series can be freely assembled in different ways of lighting effects, continuous linear lighting, can also focus on the gap lighting, because it has a magnet function, so you can quickly install and replace.

01 6 ME Headliner can be used recessed, suspended and surface mounted .

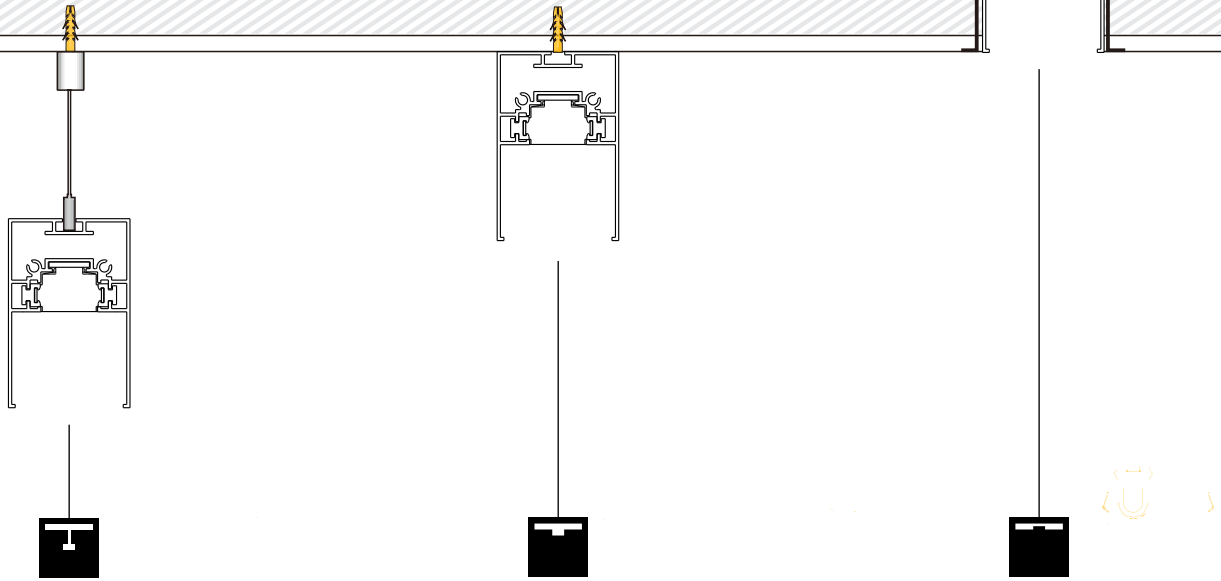




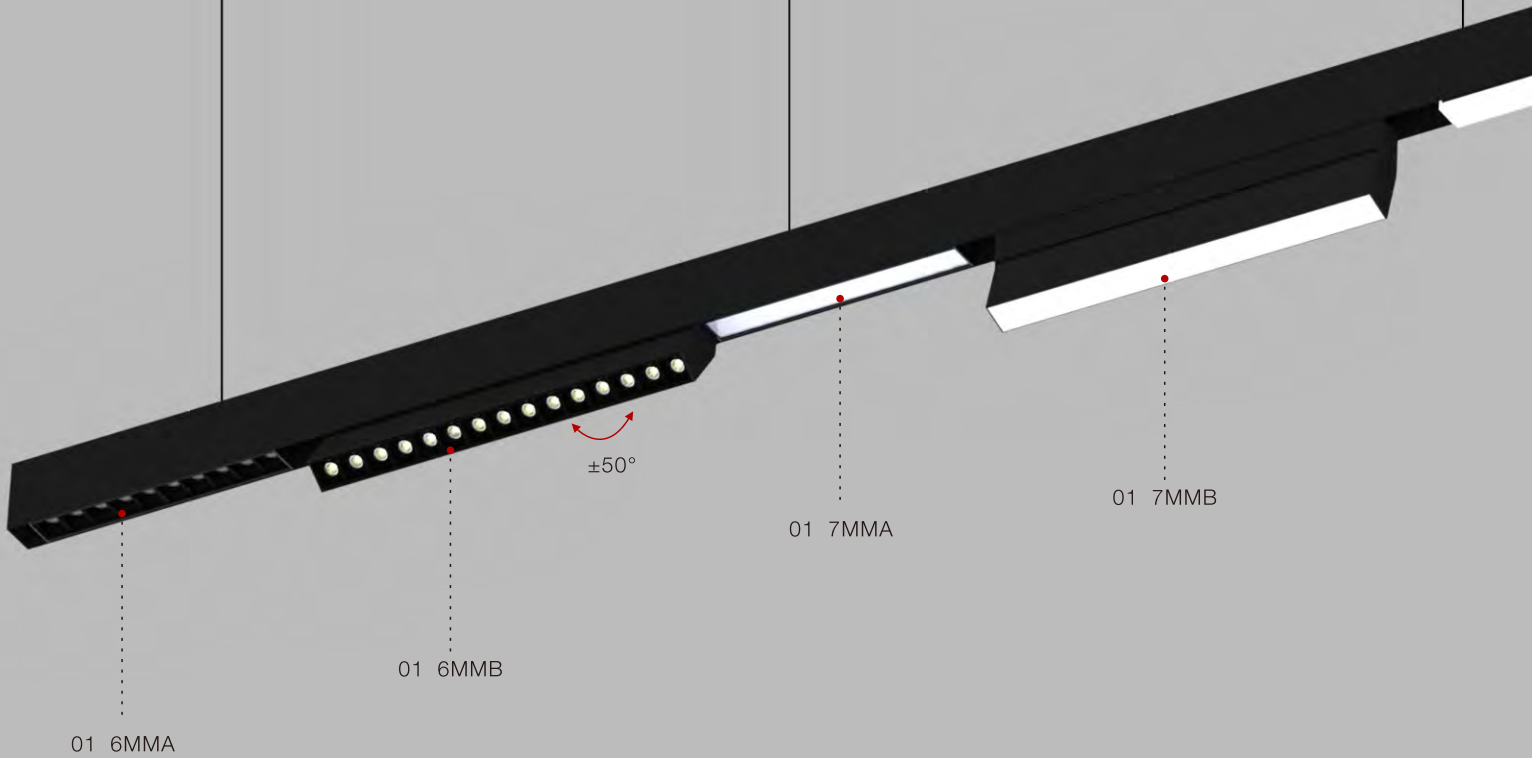

Changeable

01 6ME series can be replaced to install a variety of lamps, to suit different environments.



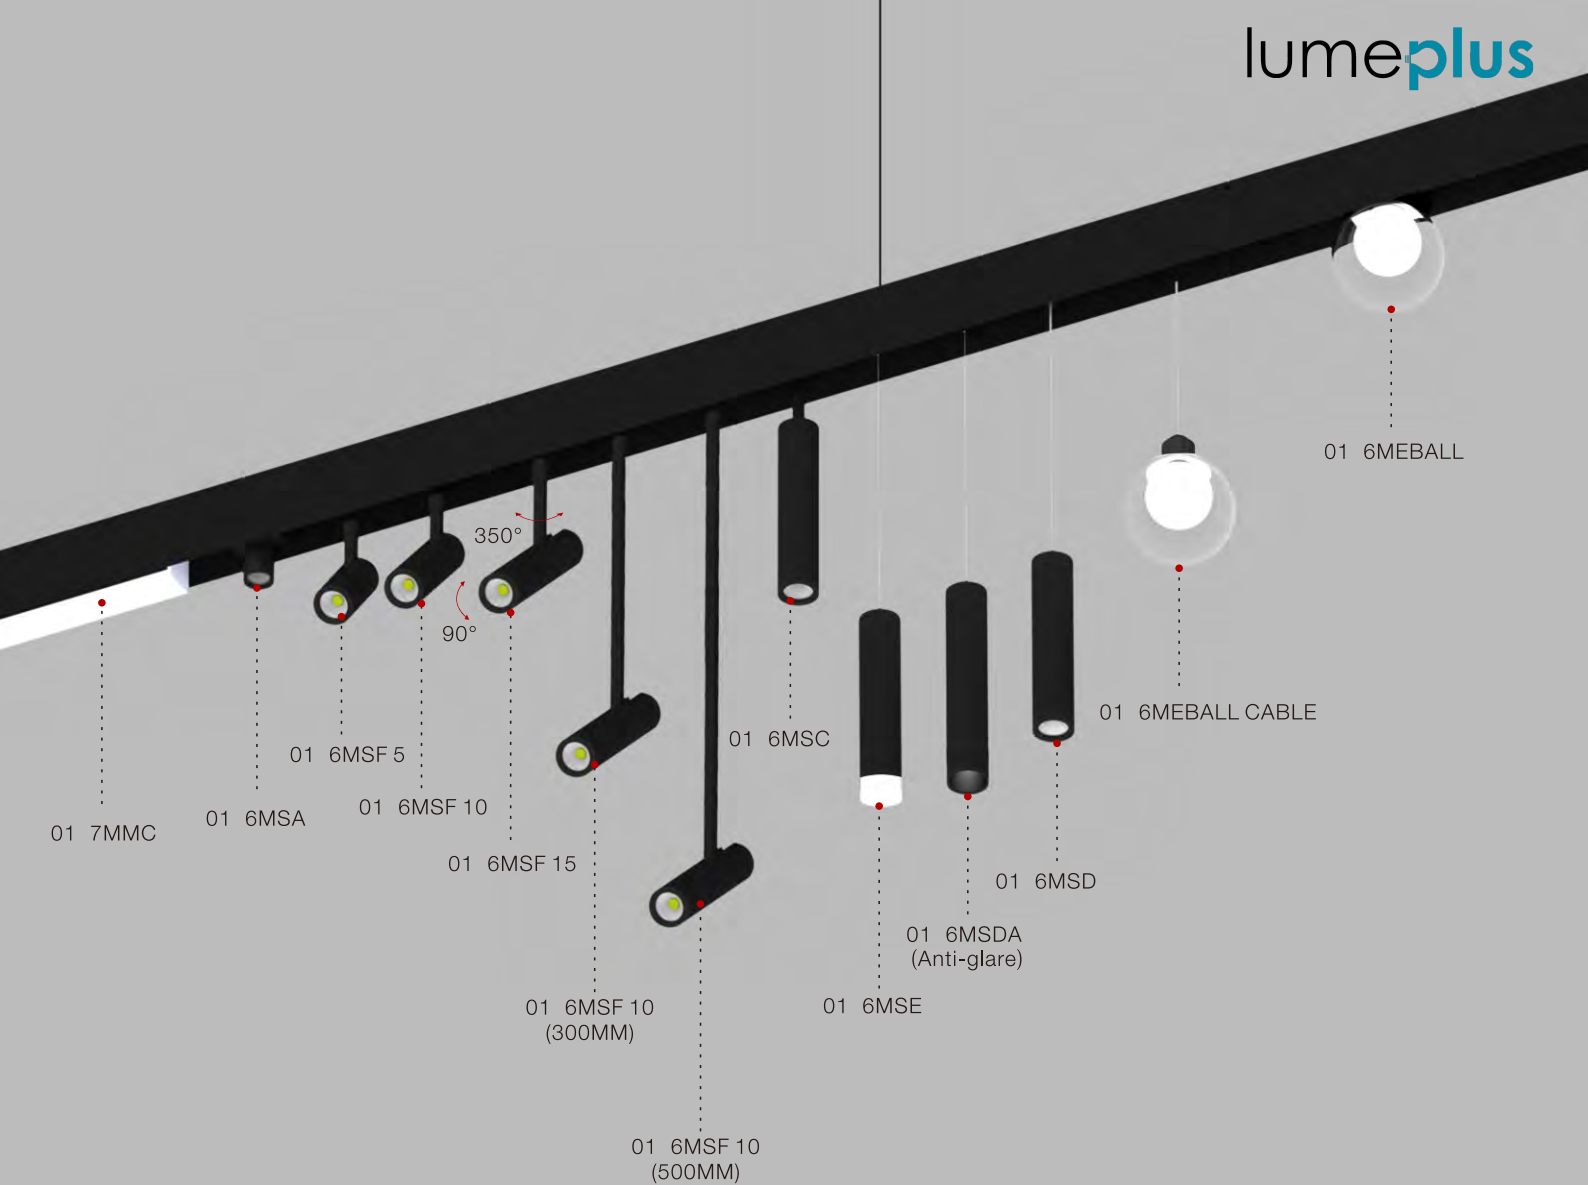

01 7MMC

01 6MSA

01 6MSF 5

01 6MSF 10

01 6MSF 15

01 6MSF 10
(300MM)

01 6MSF 10
(500MM)

01 6MSC

01 6MSE

01 6MSDA
(Anti-glare)

01 6MSD

01 6MEBALL CABLE

01 6MEBALL

Analysis of Magnetic System Structure

- Safe and reliable, through the pull test. Easy maintenance, rapid replacement without tools.

Through  pull test
Report No.: **50132428 001**




Magnetic & Click
100% Safety




Test items and test requirements	Test instruction	Determination
Lamp head pull test: The pull of the lamp head out of the lamp base is at least 4 times the weight of the lamp base.	Lamp weight: 0,8kg 4 times the weight of the lamp head pull: 31,36N Lamp head pulls off from lamp holder: 34N for the first time 39N for the second time	Pass


- Magnetic linear light system operates with various kinds of lamps, meeting the needs of different applications.
- DC24V output, safety guarantee.

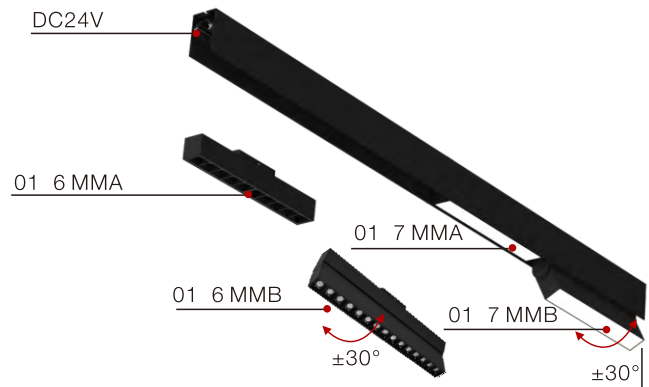


**SUSPENSION
(Pipe / line)**

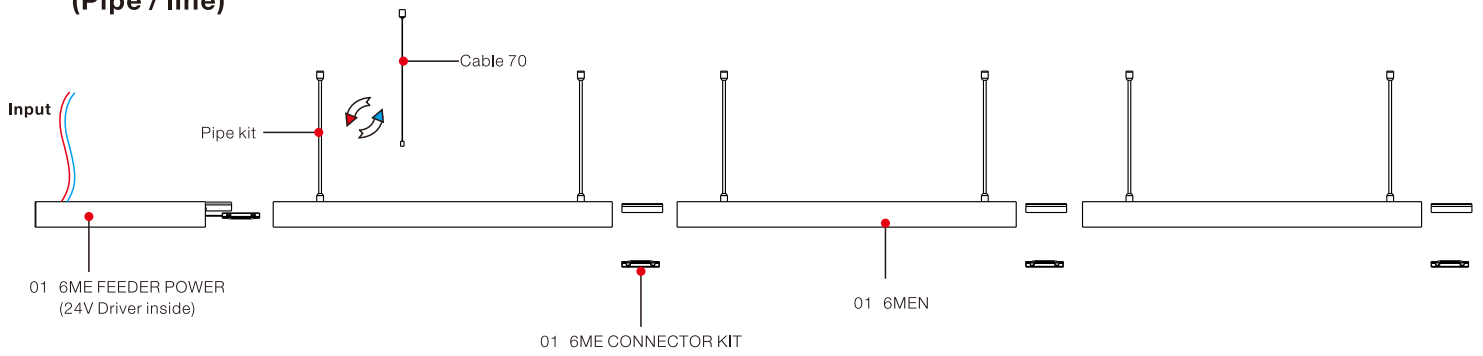

SURFACE

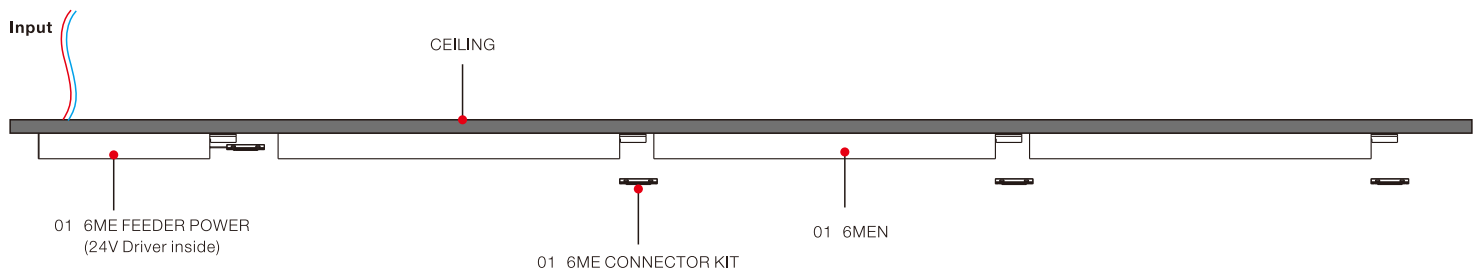

RECESSED

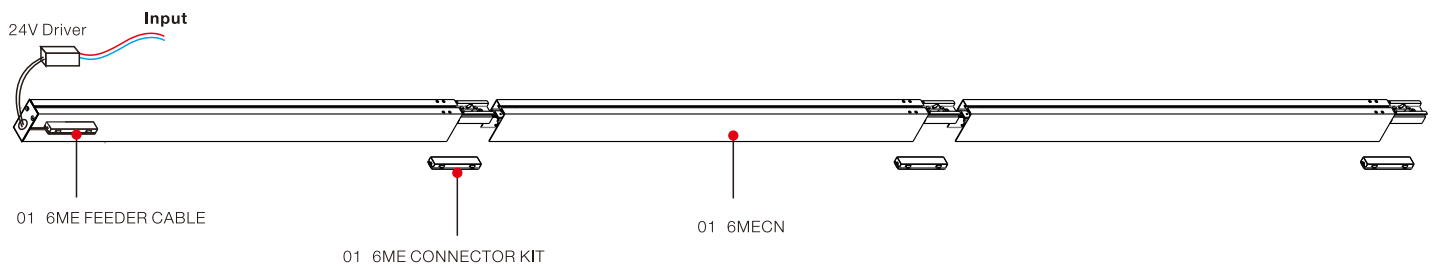

LIGHT MODULES



15W
CRI>90
Anti-glare



22W
CRI>90
Anti-glare




15W
CRI>90
Anti-glare




22W
CRI>90
Anti-glare




15W
CRI>90




22W
CRI>90



45W
CRI>90




15W
CRI>90



22W
CRI>90



15W
CRI>90



22W
CRI>90



45W
CRI>90




01 6MMS 5W
5W
CRI>90
Anti-glare




01 6MMS 15W
15W
CRI>90
Anti-glare



01 6MSS 8 G2
01 6MSS 8 G2 Brass
01 6MSS 8
8W
CRI>90
Ultra narrow angle
Anti-glare

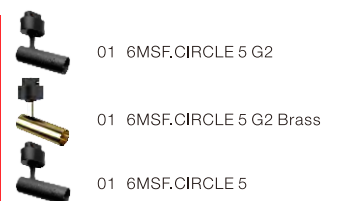

01 6MSF.CIRCLE 5 G2
01 6MSF.CIRCLE 5 G2 Brass
01 6MSF.CIRCLE 5
5W
CRI>90
Anti-glare

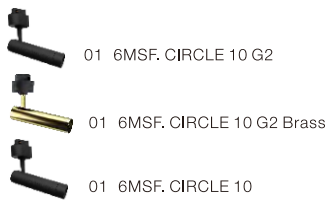

01 6MSF.CIRCLE 10 G2
01 6MSF.CIRCLE 10 G2 Brass
01 6MSF.CIRCLE 10
10W
CRI>90
Anti-glare



01 6MSF.CIRCLE 15 G2
01 6MSF.CIRCLE 15 G2 Brass
01 6MSF.CIRCLE 15
15W
CRI>90
Anti-glare



01 6BALL 5
5W
CRI>90



01 6BALL CABLE 5
5W
CRI>90

LIGHT MODULES



01 6MSF 5
5W
CRI>90



01 6MSF 10
10W
CRI>90



01 6MSF 15
15W
CRI>90



01 6MSA 5
5W
CRI>90



01 6MSC 10
10W
CRI>90



01 6MSD 10
10W
CRI>90



01 6MSDA 10
10W
CRI>90
Anti-glare



01 6MSE 15
15W
CRI>90



01 6ME cone
5W
CRI>90




01 6ME cone cable
5W
CRI>90




Example of suspended installation

Appliance suitable for suspended, ceiling or semi-recessed installation; shown here in the single suspension version with sliding cables.







Kit for suspension with sliding cables. Variable distancing between anchor points.



Example of the connection between linear

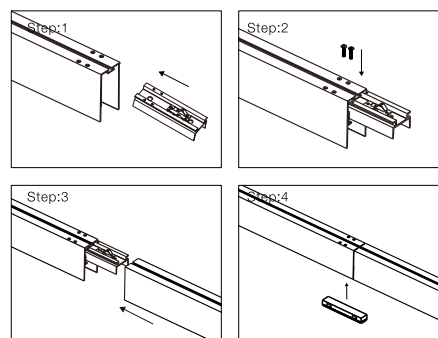

Installation

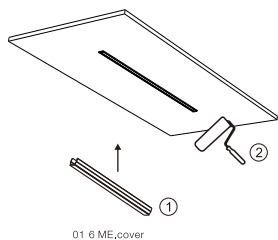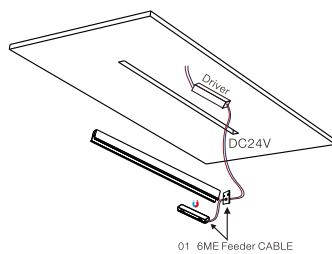


Dimmable


Thanks to the advancement of wireless technology and intelligent systems, we have upgraded the wireless operation of the lamps to a new level of technology. This smart dimming application can easily turn on or off the lighting fixtures and adjust the brightness through any smart device (such as a mobile phone, tablet computer, computer, or intelligent control panel) that carries Bluetooth functions.



Installation diagram

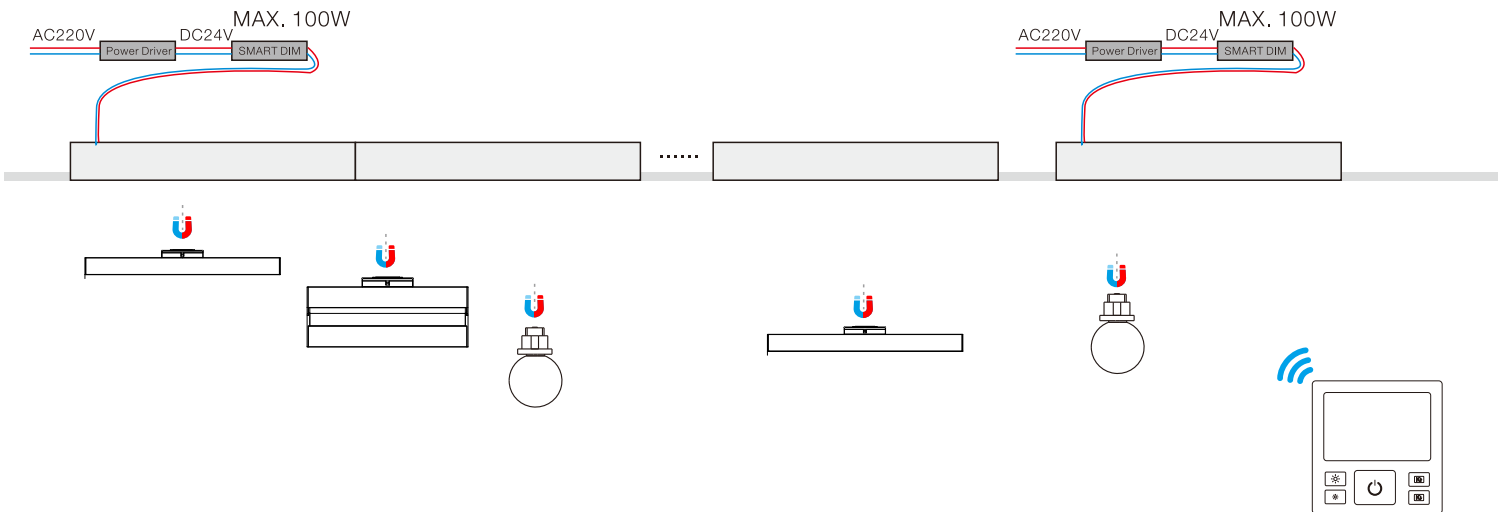

Dimming effect chart

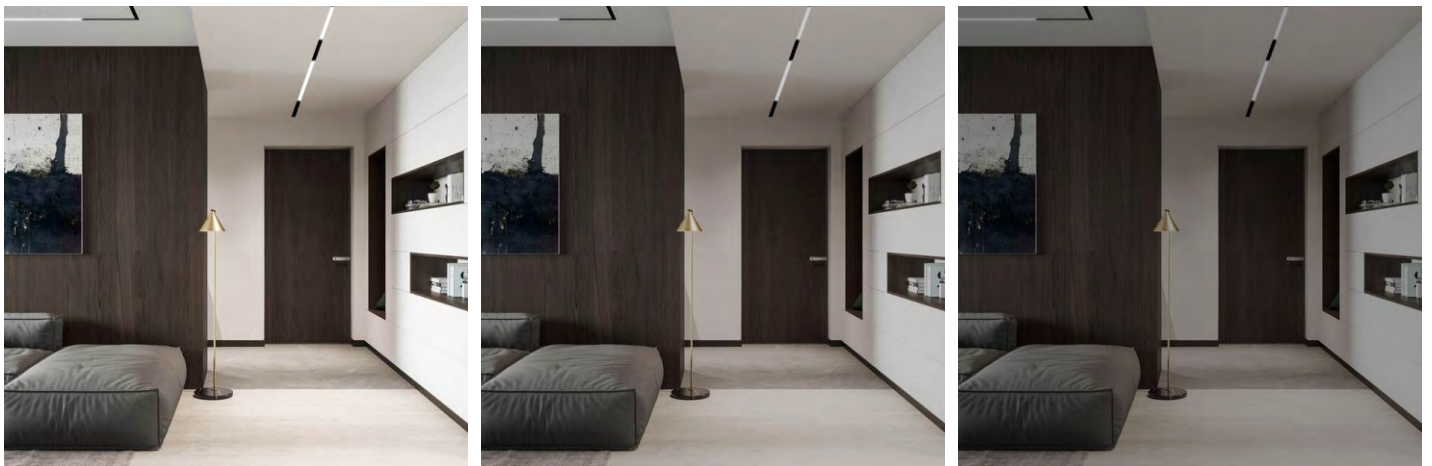

100%

50%


0%








This model can only do suspend or surface mounted

Installation exploded view


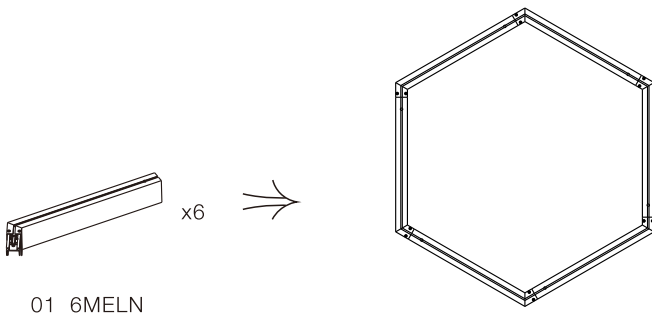


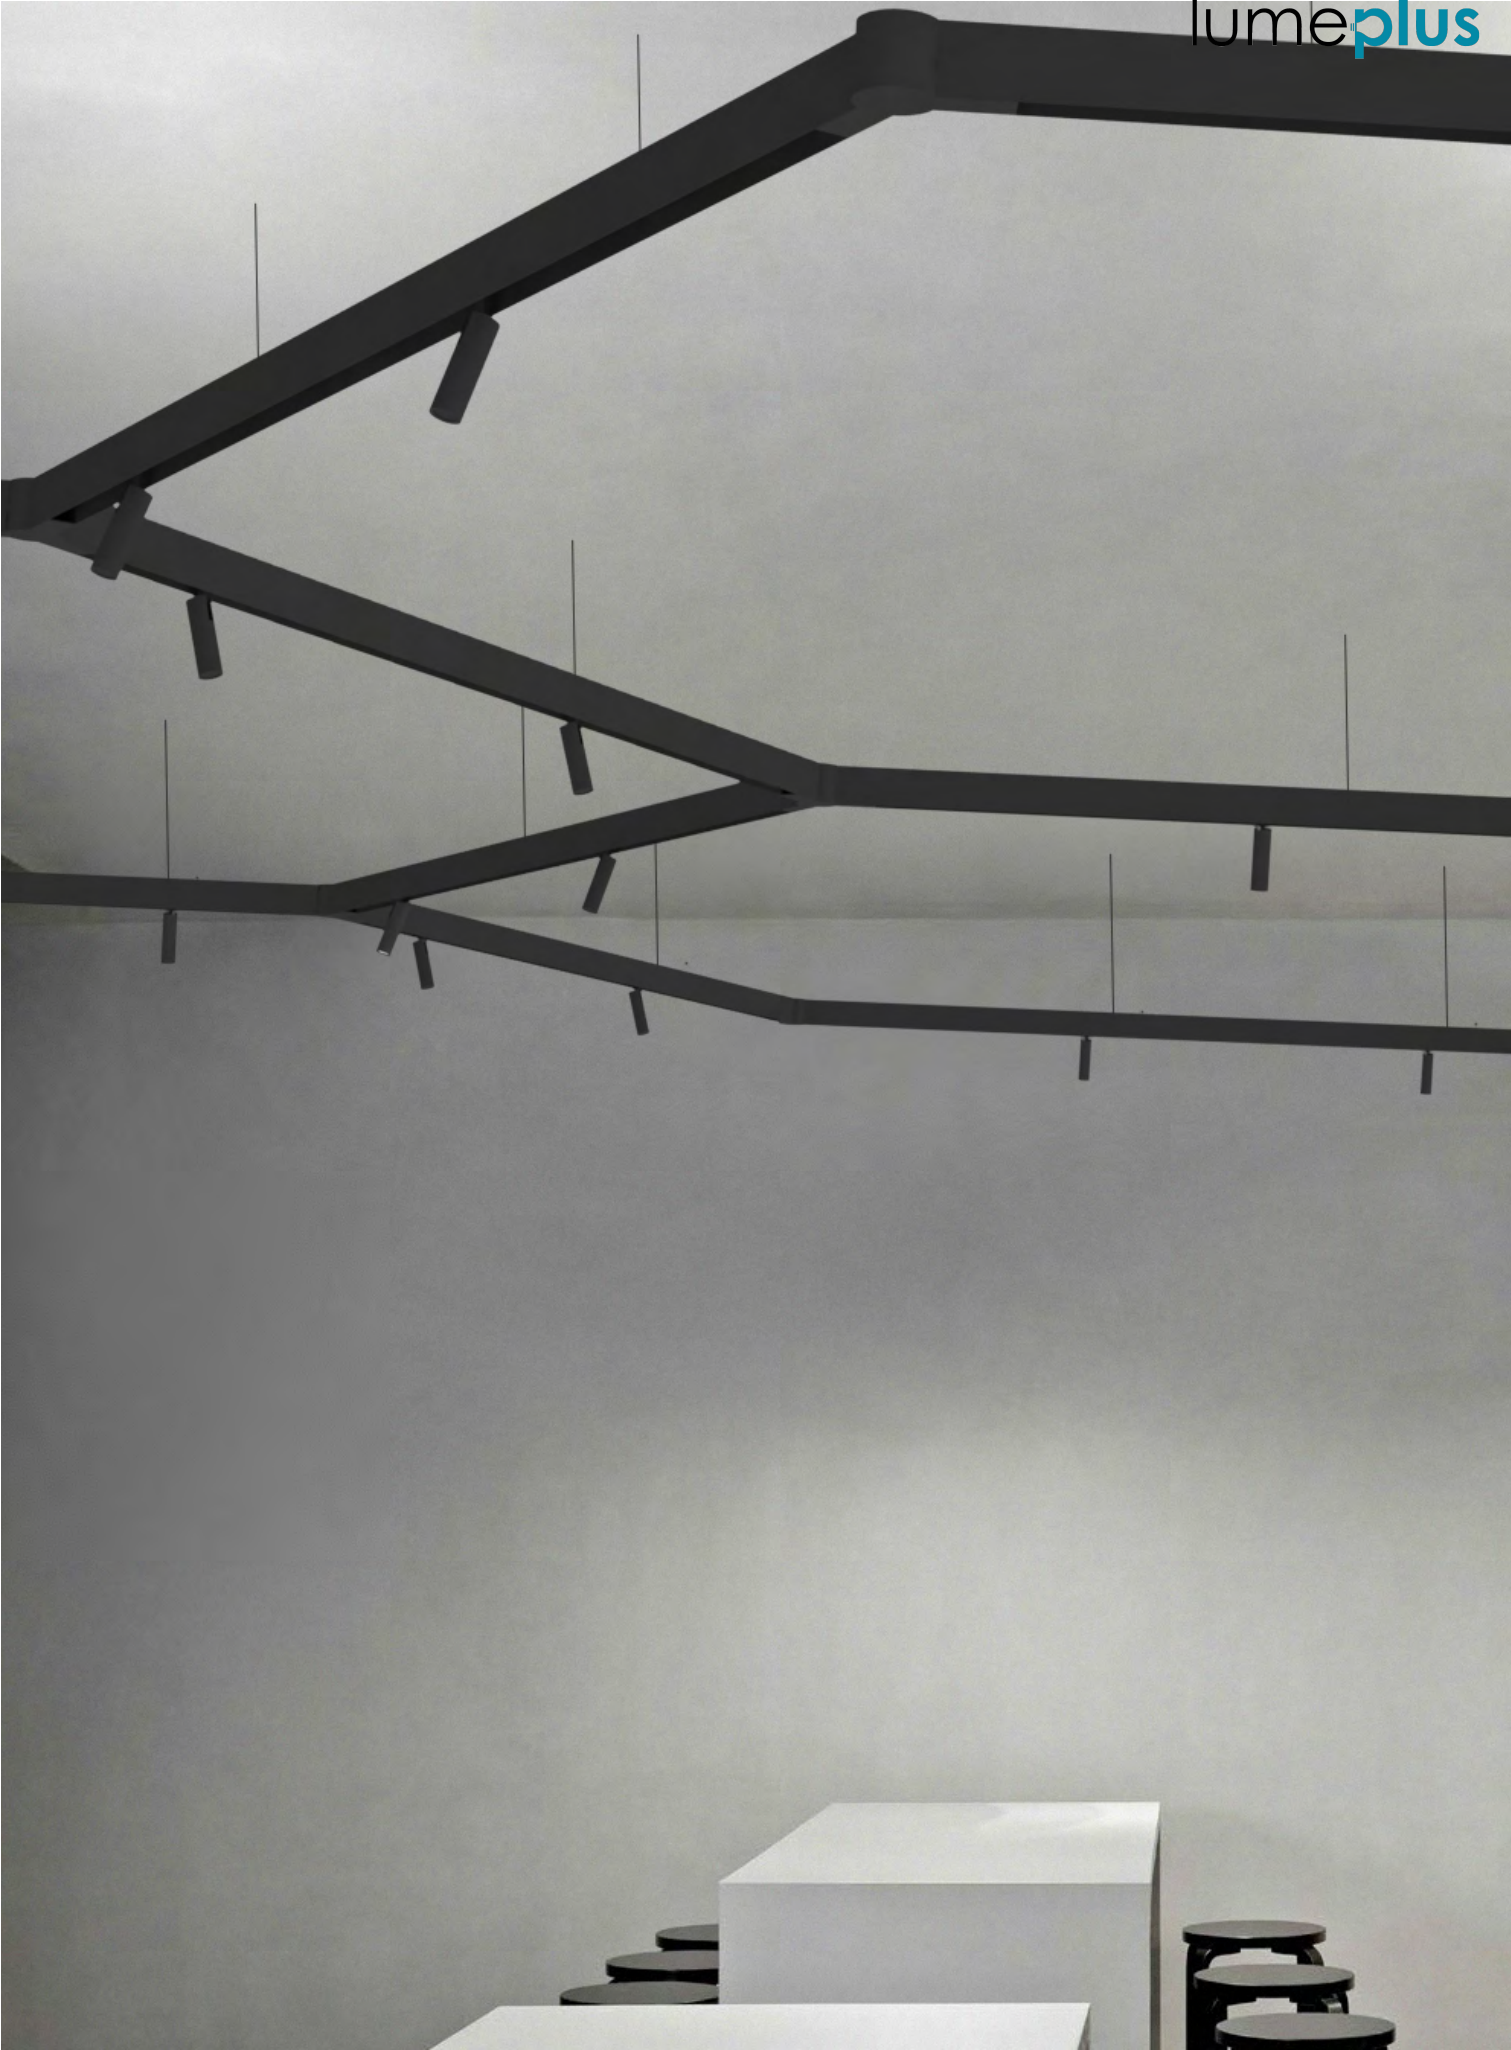

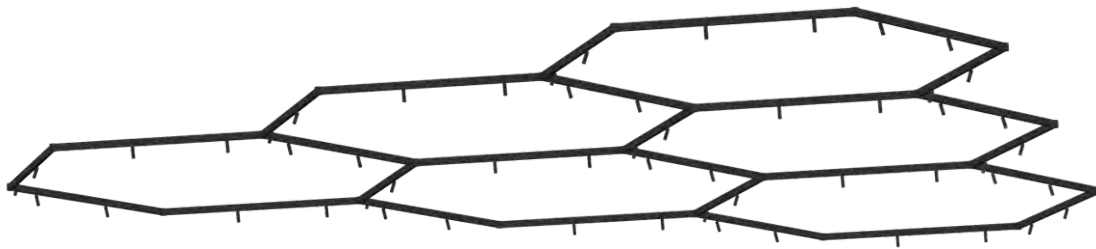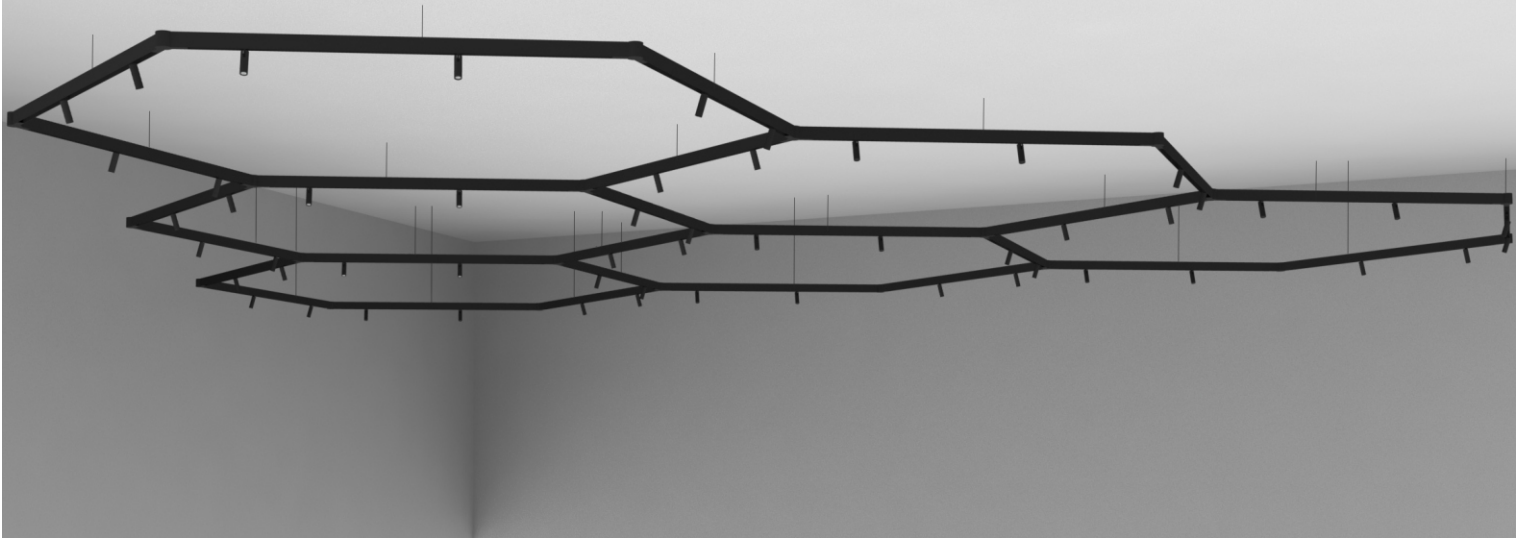


This model can only do suspend or surface mounted

Installation exploded view

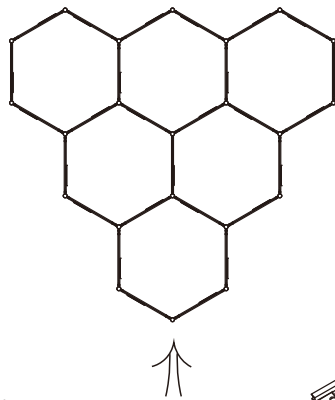


x12

01 6MEN Corner V60°




x10

01 6MEN Corner 3V60°



x54

01 6 ME connector kit




x27



01 6 MEN

01 6ME MAGNETIC LINEAR LIGHTING SYSTEM
ASYMMETRICAL LIGHTING SOLUTIONS


01 7ASY

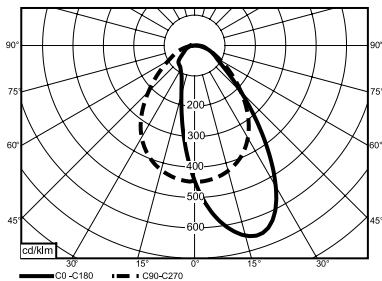

01 7DASY

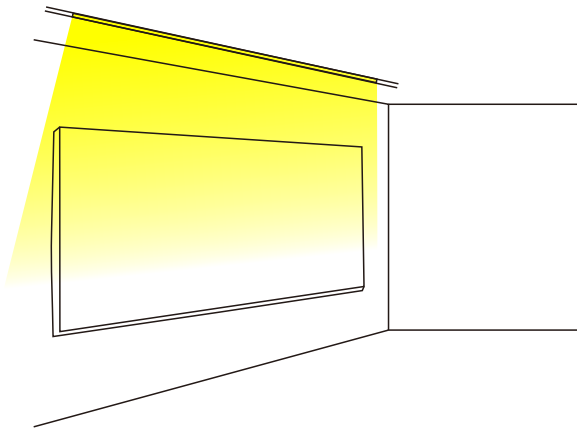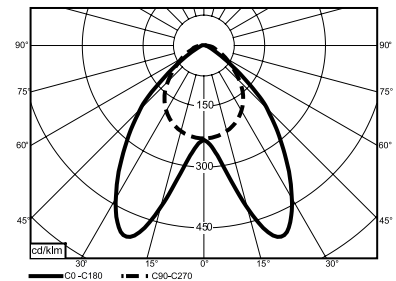


The design and application of single polarized optics in the art gallery. Continuous installation creates a perfect single-polarized wall-washing effect, making it easy for visitors to enjoy paintings in a comfortable lighting environment.

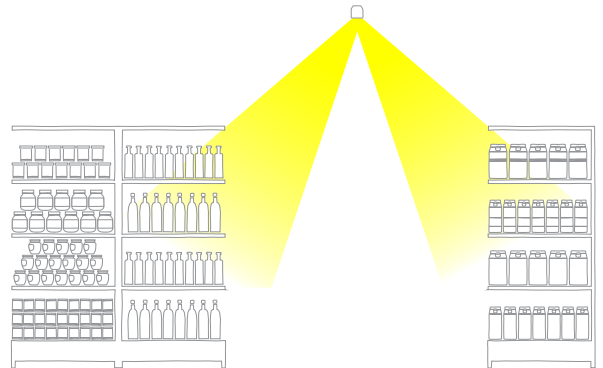


The design of dual polarized optical components in the central lane of the supermarket. Achieve the dual functions of comfortable general lighting and accent lighting during the customer purchase process. Special lenses transmit light laterally, reducing glare in the past, so that people's attention is focused on the shelf, and the customer's eyes focus on the displayed object to enhance the shopping experience.

Correct installation

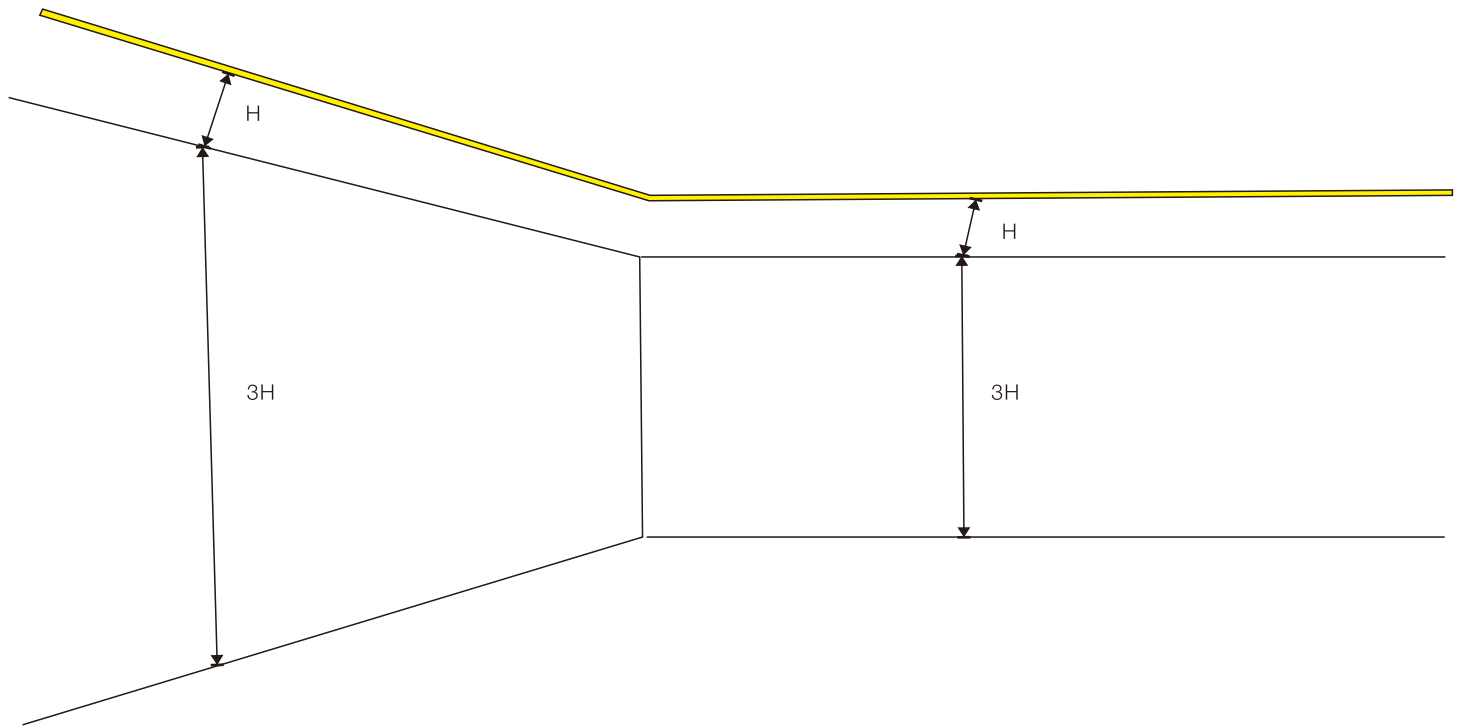


The table shows the correct installation distances for uniform lighting on the wall.



code	L (m)	h (m)
01 7ASY	1.5	4.5




01 7ASY

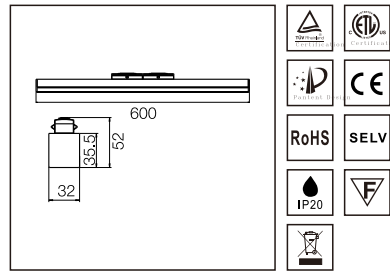

Power	20W
CCT	3000K ● 4000K ● 6500K ○
Voltage	DC24V
Output Lumens	1600lm
CRI	>90
Material	Aluminum
Color	Black
Life	30 000 H
Warranty	3 Years


LED 3000K
CODE:AA8888888



HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
44.3°			
1.5	444	499	122
2	250	281	163
4	62	70	325
4.5	49	55	366
6	28	31	488

21.2W 1212lm Ra:94


LED 4000K
CODE:AA8888888



HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
56.3°			
1.5	427	605	160
2	240	340	214
4	60	85	428
4.5	47	67	481
6	27	38	642


22W 1298lm Ra:94

01 7DASY

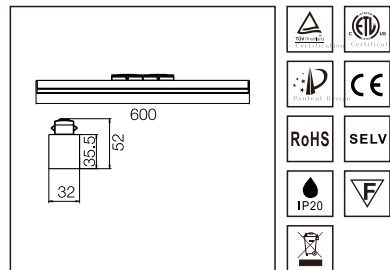

Power	20W
CCT	3000K ● 4000K ● 6500K ○
Voltage	DC24V
Output Lumens	1600lm
CRI	>90
Material	Aluminum
Color	Black
Life	30 000 H
Warranty	3 Years


LED 3000K
CODE:AA8888888



HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
92.3°			
1.5	221	309	312
2	124	174	417
4	31	43	833
4.5	25	34	937
6	14	19	1250

21.7W 1269lm Ra:93


LED 4000K
CODE:AA8888888



HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
91.8°			
1.5	224	322	310
2	126	181	413
4	32	45	826
4.5	25	36	929
6	14	20	1239


21.2W 1301m Ra:91

01 6MMA 15 G2

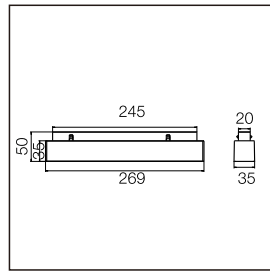


Power	15W
CCT	3000K ● 4000K ●
Voltage	DC24V
Output Lumens	1200 lm
CRI	>90
Material	Aluminum
Color	Black
Life	30 000 H
Warranty	3 Years

01 6MMA 15

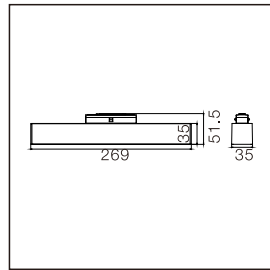


Power	15W
CCT	3000K ● 4000K ●
Voltage	DC24V
Output Lumens	1200 lm
CRI	>90
Material	Aluminum
Color	Black
Life	30 000 H
Warranty	3 Years


LED 3000K
CODE:AA8888888

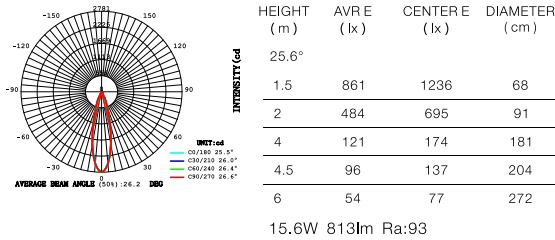


LED 4000K
CODE:AA8888888

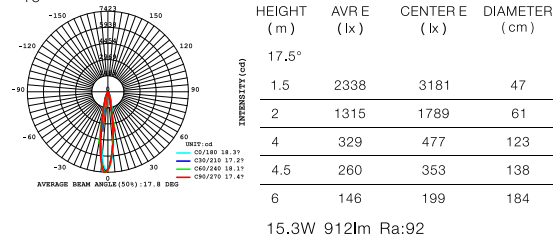


LED 3000K
CODE:AA8888888

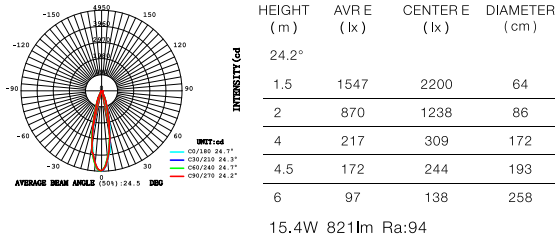


LED 4000K
CODE:AA8888888

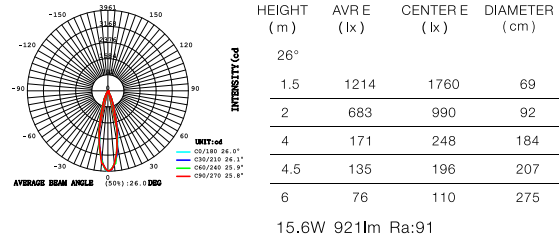


LED 3000K
CODE:AA8888888

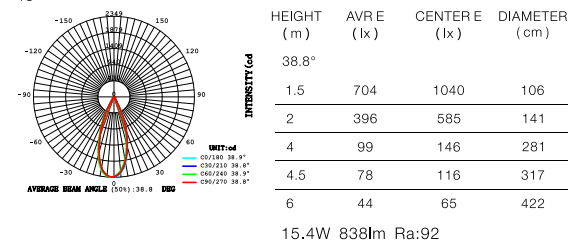

LED 4000K
CODE:AA8888888


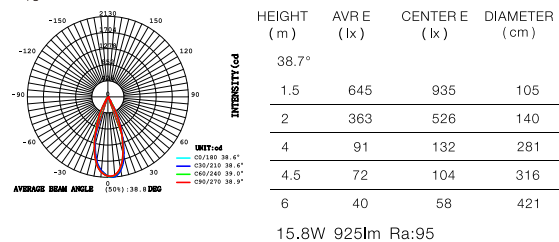


01 6MMA 22 G2

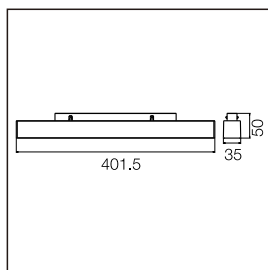


Power	22W
CCT	3000K ● 4000K ●
Voltage	DC24V
Output Lumens	1760 lm
CRI	>90
Material	Aluminum
Color	Black
Life	30 000 H
Warranty	3 Years

01 6MMA 22

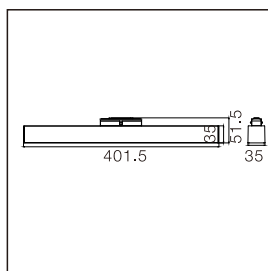


Power	22W
CCT	3000K ● 4000K ●
Voltage	DC24V
Output Lumens	1760 lm
CRI	>90
Material	Aluminum
Color	Black
Life	30 000 H
Warranty	3 Years


LED 3000K
CODE:AA8888888

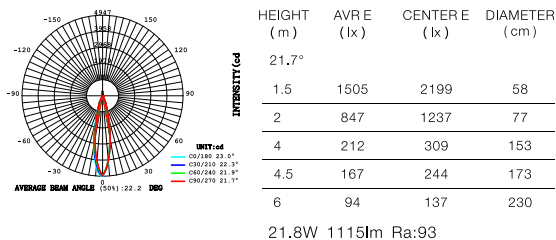


LED 4000K
CODE:AA8888888

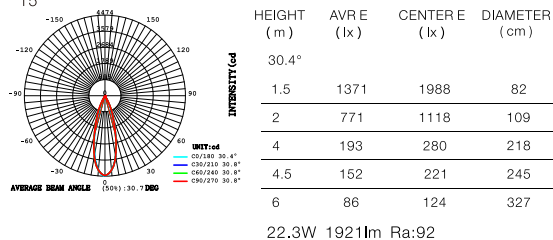


LED 3000K
CODE:AA8888888

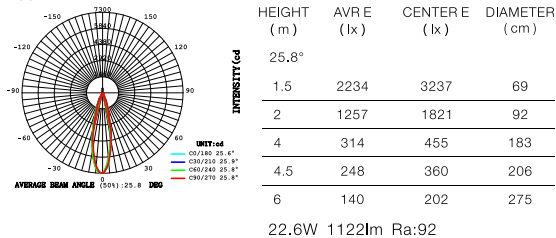


LED 4000K
CODE:AA8888888

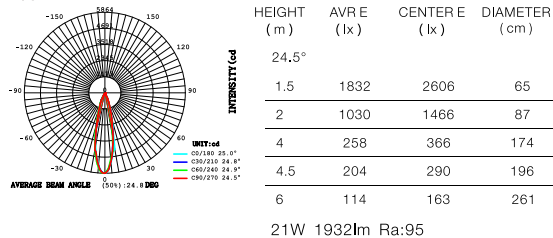


LED 3000K
CODE:AA8888888

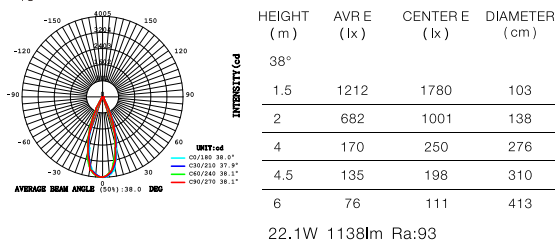

LED 4000K
CODE:AA8888888

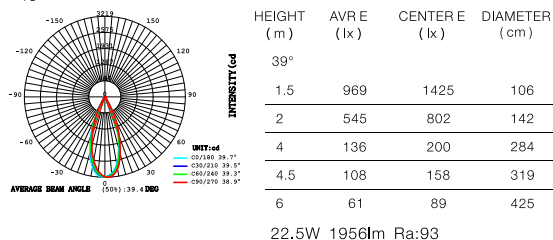


01 6MMB 15 G2

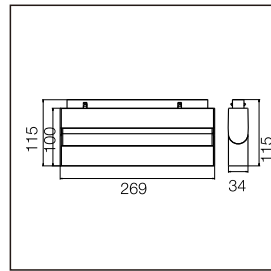


Power	15W
CCT	3000K ● 4000K ●
Voltage	DC24V
Output Lumens	1200 lm
CRI	>90
Material	Aluminum
Color	Black
Life	30 000 H
Warranty	3 Years

01 6MMB 15

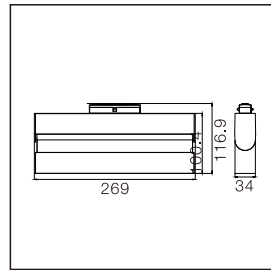


Power	15W
CCT	3000K ● 4000K ●
Voltage	DC24V
Output Lumens	1200 lm
CRI	>90
Material	Aluminum
Color	Black
Life	30 000 H
Warranty	3 Years


LED 3000K
CODE:AA8888888

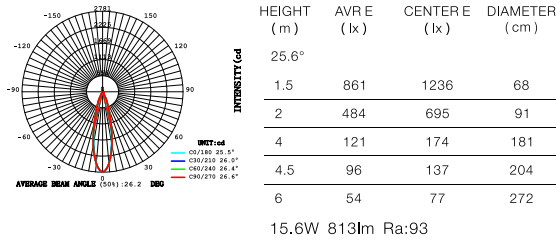


LED 4000K
CODE:AA8888888

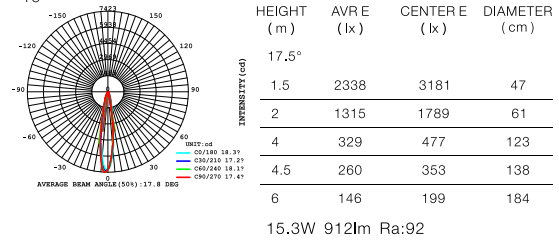


LED 3000K
CODE:AA8888888

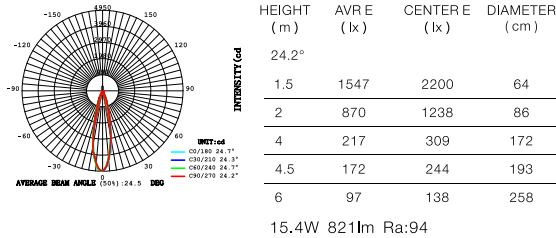


LED 4000K
CODE:AA8888888

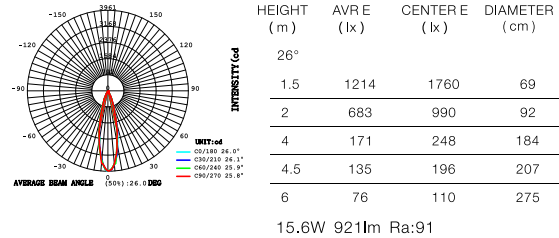


LED 3000K
CODE:AA8888888

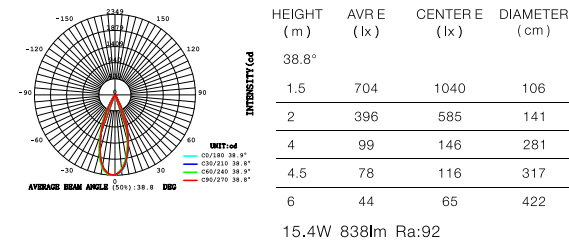

LED 4000K
CODE:AA8888888

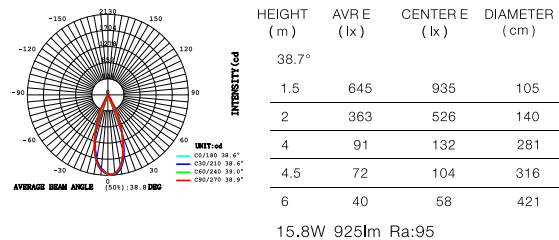


01 6MMB 22 G2

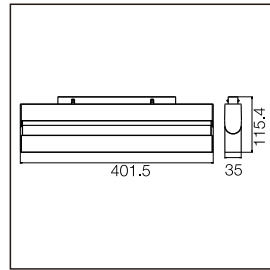


Power	22W
CCT	3000K ● 4000K ●
Voltage	DC24V
Output Lumens	1760 lm
CRI	>90
Material	Aluminum
Color	Black
Life	30 000 H
Warranty	3 Years

01 6MMB 22

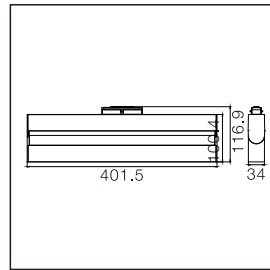


Power	22W
CCT	3000K ● 4000K ●
Voltage	DC24V
Output Lumens	1760 lm
CRI	>90
Material	Aluminum
Color	Black
Life	30 000 H
Warranty	3 Years


15° LED 3000K
CODE:AA8888888

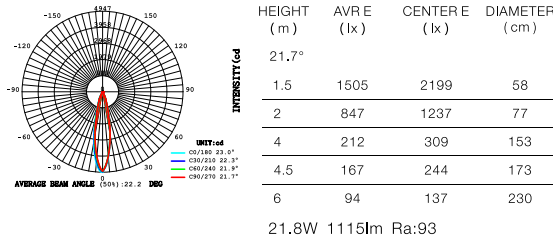


15° LED 4000K
CODE:AA8888888

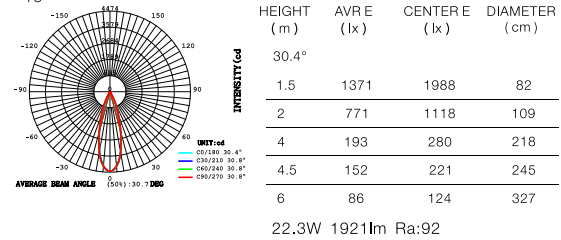


30° LED 3000K
CODE:AA8888888

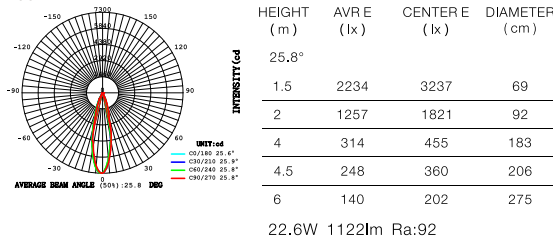


30° LED 4000K
CODE:AA8888888

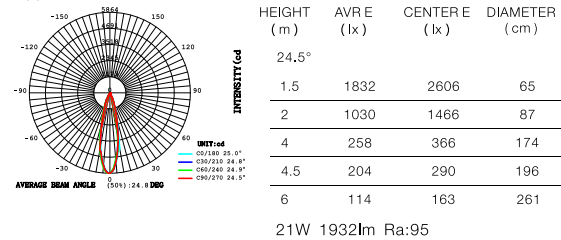



45° LED 3000K
CODE:AA8888888

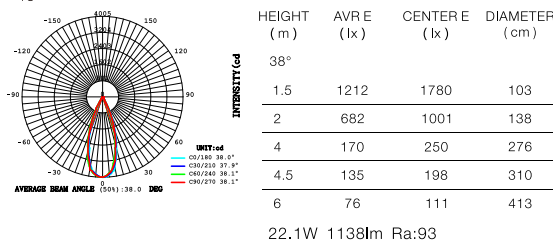

45° LED 4000K
CODE:AA8888888


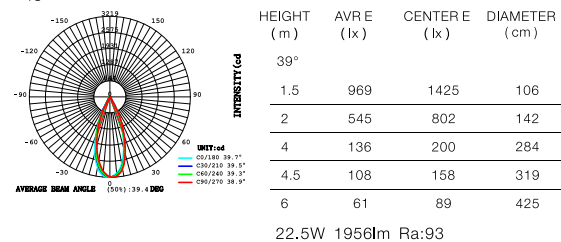


01 7MMA 15 G2

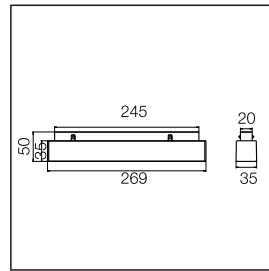


Power	15W
CCT	3000K ● 4000K ●
Voltage	DC24V
Output Lumens	1200 lm
CRI	>90
Material	Aluminum
Color	Black
Life	30 000 H
Warranty	3 Years

01 7MMA 15

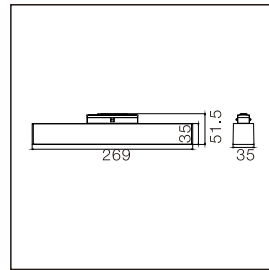

Power	15W
CCT	3000K ● 4000K ●
Voltage	DC24V
Output Lumens	1200 lm
CRI	>90
Material	Aluminum
Color	Black
Life	30 000 H
Warranty	3 Years


LED 3000K
CODE:AA8888888



HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
1.5	13	34	353
2	7	19	471
4	2	5	941
4.5	2	4	1059
6	1	2	1412

14.9W 669lm Ra:93

LED 4000K
CODE:AA8888888




HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
1.5	39	102	345
2	22	57	459
4	6	14	919
4.5	4	11	1034
6	2	6	1378

15.3W 703lm Ra:91





01 7MMA 22 G2

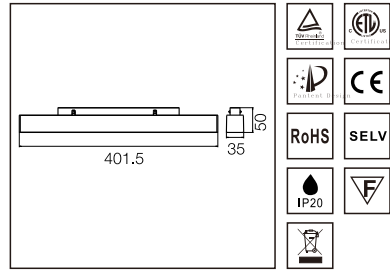


Power	22W
CCT	3000K ● 4000K ●
Voltage	DC24V
Output Lumens	1760 lm
CRI	>90
Material	Aluminum
Color	Black
Life	30 000 H
Warranty	3 Years

01 7MMA 22

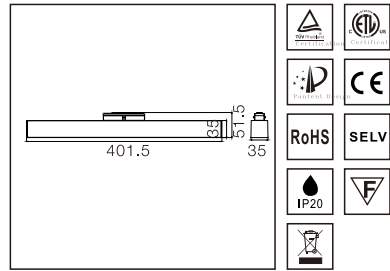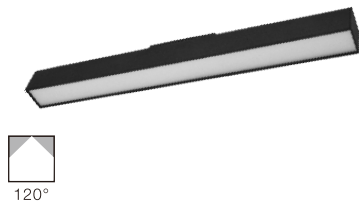


Power	22W
CCT	3000K ● 4000K ●
Voltage	DC24V
Output Lumens	1760 lm
CRI	>90
Material	Aluminum
Color	Black
Life	30 000 H
Warranty	3 Years


LED 3000K
CODE:AA8888888

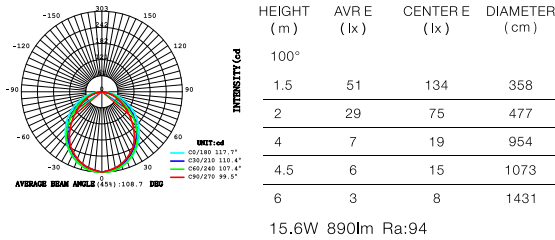

LED 4000K
CODE:AA8888888

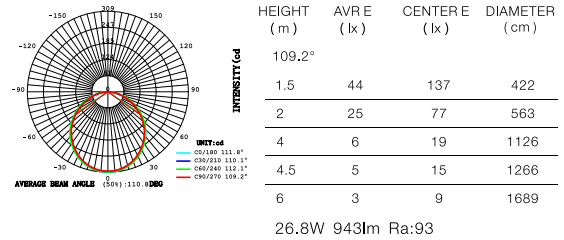


01 7MMA 45 G2

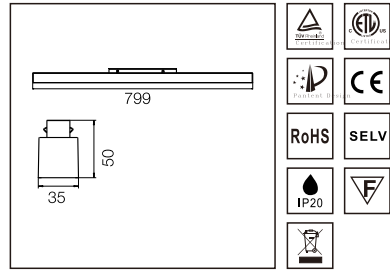

- Power** 45W
- CCT** 3000K ● 4000K ●
- Voltage** DC24V
- Output Lumens** 3600 lm
- CRI** >90
- Material** Aluminum
- Color** Black
- Life** 30 000 H
- Warranty** 3 Years


LED 3000K
CODE:AA8888888



HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
103°			
1.5	104	292	377
2	58	164	503
4	15	41	1005
4.5	12	32	1131
6	7	18	1508

45.5W 1920lm Ra:93


LED 4000K
CODE:AA8888888



HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
108.8°			
1.5	133	417	419
2	75	234	559
4	19	59	1117
4.5	15	46	1257
6	8	26	1676


45.9W 2016lm Ra:93

01 7MMB 15 G2

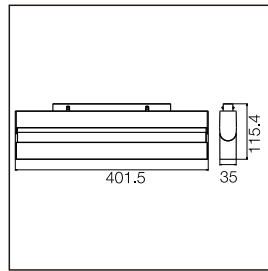


Power	15W
CCT	3000K ● 4000K ●
Voltage	DC24V
Output Lumens	1200 lm
CRI	>90
Material	Aluminum
Color	Black
Life	30 000 H
Warranty	3 Years

01 7MMB 15

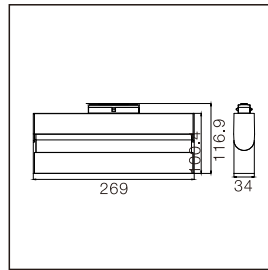

Power	15W
CCT	3000K ● 4000K ●
Voltage	DC24V
Output Lumens	1200 lm
CRI	>90
Material	Aluminum
Color	Black
Life	30 000 H
Warranty	3 Years


LED 3000K
CODE:AA8888888



HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
1.5	13	34	353
2	7	19	471
4	2	5	941
4.5	2	4	1059
6	1	2	1412

14.9W 669lm Ra:93


LED 4000K
CODE:AA8888888



HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
1.5	39	102	345
2	22	57	459
4	6	14	919
4.5	4	11	1034
6	2	6	1378


15.3W 703lm Ra:91

01 7MMB 22 G2

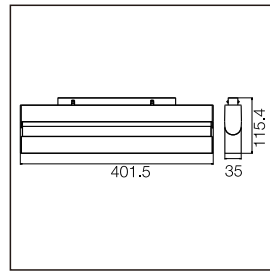


Power	22W
CCT	3000K ● 4000K ●
Voltage	DC24V
Output Lumens	1760 lm
CRI	>90
Material	Aluminum
Color	Black
Life	30 000 H
Warranty	3 Years

01 7MMB 22

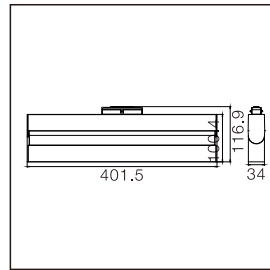

Power	22W
CCT	3000K ● 4000K ●
Voltage	DC24V
Output Lumens	1760 lm
CRI	>90
Material	Aluminum
Color	Black
Life	30 000 H
Warranty	3 Years


LED 3000K
CODE:AA8888888



HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
100°			
1.5	51	134	358
2	29	75	477
4	7	19	954
4.5	6	15	1073
6	3	8	1431

15.6W 890lm Ra:94


LED 4000K
CODE:AA8888888



HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
109.2°			
1.5	44	137	422
2	25	77	563
4	6	19	1126
4.5	5	15	1266
6	3	9	1689


26.8W 943lm Ra:93

01 7MMC 15 G2

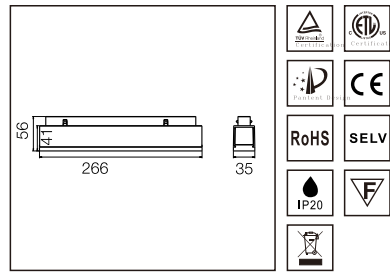


Power	15W
CCT	3000K ● 4000K ●
Voltage	DC24V
Output Lumens	1200 lm
CRI	>90
Material	Aluminum
Color	Black
Life	30 000 H
Warranty	3 Years

01 7MMC 15

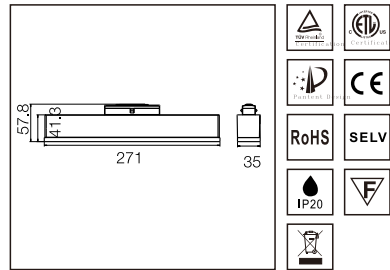

Power	15W
CCT	3000K ● 4000K ●
Voltage	DC24V
Output Lumens	1200 lm
CRI	>90
Material	Aluminum
Color	Black
Life	30 000 H
Warranty	3 Years


LED 3000K
CODE:AA8888888



HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
100°			
1.5	52	117	309
2	29	66	412
4	7	17	824
4.5	6	13	927
6	3	7	1236

15.4W 601m Ra:93


LED 4000K
CODE:AA8888888



HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
109.2°			
1.5	20	73	486
2	11	41	648
4	3	10	1296
4.5	2	8	1458
6	1	5	1944



15.3W 649lm Ra:91

01 7MMC 22 G2

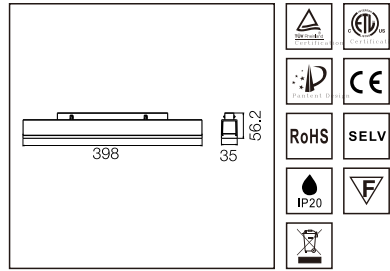


- Power** 22W
- CCT** 3000K ● 4000K ●
- Voltage** DC24V
- Output Lumens** 1760 lm
- CRI** >90
- Material** Aluminum
- Color** Black
- Life** 30 000 H
- Warranty** 3 Years

01 7MMC 22

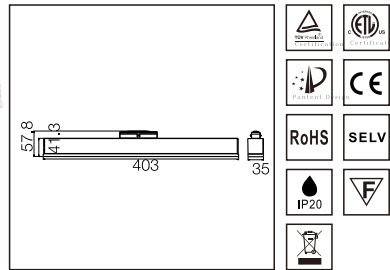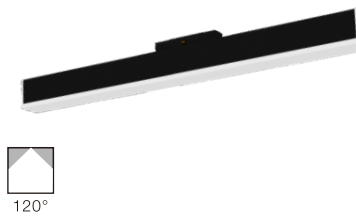


- Power** 22W
- CCT** 3000K ● 4000K ●
- Voltage** DC24V
- Output Lumens** 1760 lm
- CRI** >90
- Material** Aluminum
- Color** Black
- Life** 30 000 H
- Warranty** 3 Years


120° ● **LED 3000K**
CODE:AA8888888

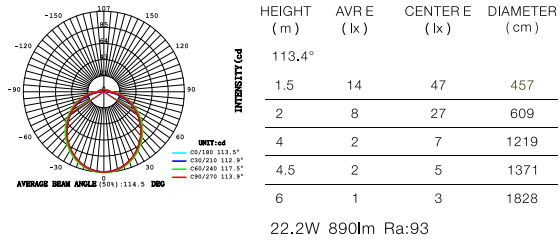

120° ● **LED 4000K**
CODE:AA8888888

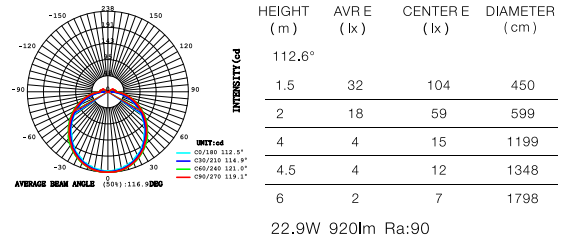


01 7MMC 45 G2

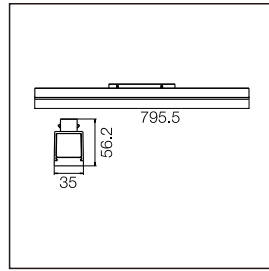


- Power** 12W
- CCT** 3000K ● 4000K ●
- Voltage** DC24V
- Output Lumens** 3600 lm
- CRI** >90
- Material** Aluminum
- Color** Black
- Life** 30 000 H
- Warranty** 3 Years

LED 3000K
CODE:AA8888888



HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
111.5°			
1.5	66	213	441
2	37	120	588
4	9	30	1186
4.5	7	24	1323
6	4	13	1764
44.6W 1783lm Ra:93			


LED 4000K
CODE:AA8888888



HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
113.2°			
1.5	103	346	455
2	58	195	607
4	14	49	1214
4.5	11	38	1366
6	6	22	1822
45.8W 1920lm Ra:92			




01 6MMS 5W

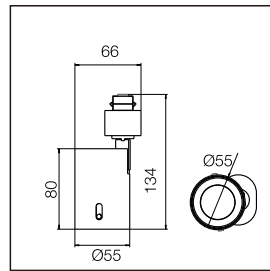


Power	5W
CCT	3000K ● 4000K ●
Voltage	DC24V
Output Lumens	400 lm
CRI	>90
Material	Aluminum
Color	Black
Life	30 000 H
Warranty	3 Years

01 6MMS 15W

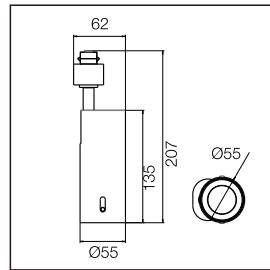

Power	15W
CCT	3000K ● 4000K ●
Voltage	DC24V
Output Lumens	1200 lm
CRI	>90
Material	Aluminum
Color	Black
Life	30 000 H
Warranty	3 Years

LED 3000K
CODE:AA8888888




HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
14,2°			
1.5	1117	1584	37
2	626	891	50
4	157	223	99
4.5	124	176	112
6	70	99	149

5.2W 266lm Ra:93

LED 4000K
CODE:AA8888888



LED 3000K
CODE:AA8888888





HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
22°			
1.5	1119	1533	58
2	629	862	78
4	157	216	156
4.5	124	170	175
6	70	96	233

5.2W 286lm Ra:93

LED 4000K
CODE:AA8888888





01 6MSS 8 G2

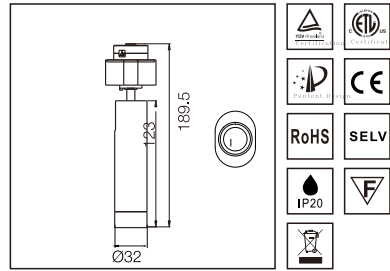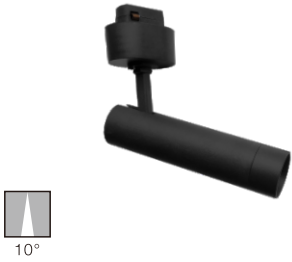


Power 8W
CCT 3000K ● 4000K ●
Voltage DC24V
Output Lumens 640 lm
CRI >90
Material Aluminum
Color Black / White
Life 30 000 H
Warranty 3 Years

01 6MSS 8 G2 Brass

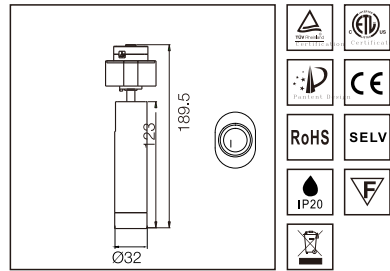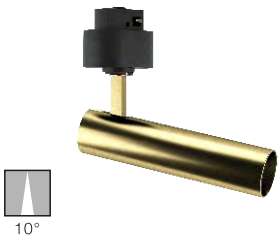


Power 8W
CCT 3000K ● 4000K ●
Voltage DC24V
Output Lumens 640 lm
CRI >90
Material Aluminum
Color Black / White
Life 30 000 H
Warranty 3 Years

01 6MSS 8

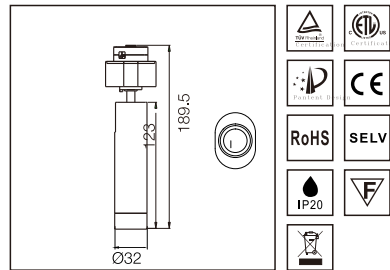


Power 8W
CCT 3000K ● 4000K ●
Voltage DC24V
Output Lumens 640 lm
CRI >90
Material Aluminum
Color Black
Life 30 000 H
Warranty 3 Years



10° LED 3000K
 CODE:AA8888888

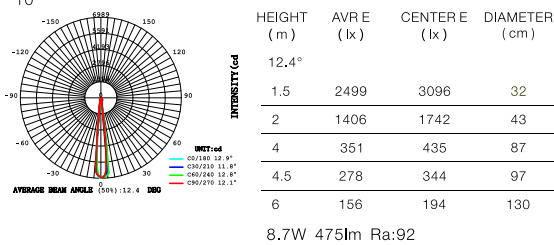

10° LED 4000K
 CODE:AA8888888


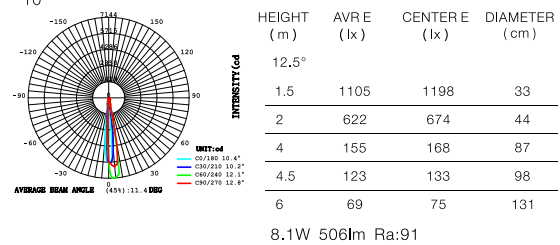


01 6MSF.CIRCLE 5 G2

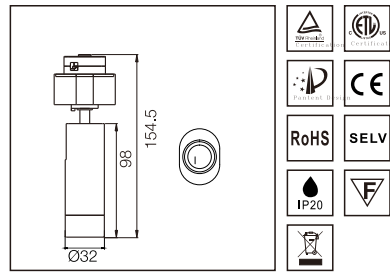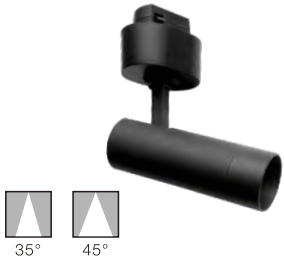



Power	5W
CCT	3000K ● 4000K ●
Voltage	DC24V
Output Lumens	400 lm
CRI	>90
Material	Aluminum
Color	Black / White
Life	30 000 H
Warranty	3 Years

01 6MSF.CIRCLE 5 G2 Brass

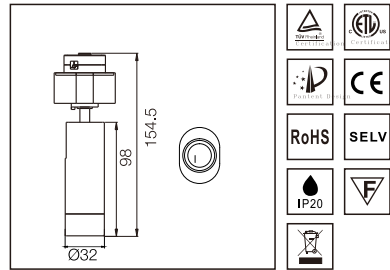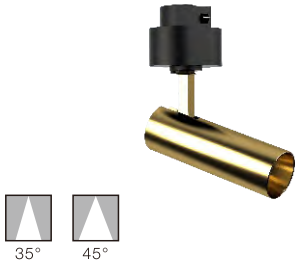


Power	5W
CCT	3000K ● 4000K ●
Voltage	DC24V
Output Lumens	400 lm
CRI	>90
Material	Aluminum
Color	Black / White
Life	30 000 H
Warranty	3 Years

01 6MSF.CIRCLE 5

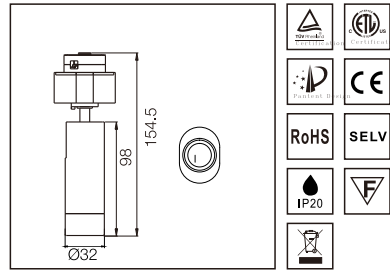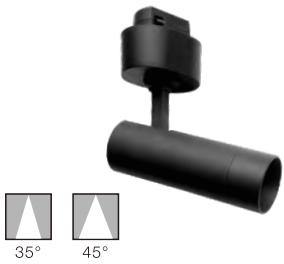


Power	5W
CCT	3000K ● 4000K ●
Voltage	DC24V
Output Lumens	400 lm
CRI	>90
Material	Aluminum
Color	Black
Life	30 000 H
Warranty	3 Years


LED 3000K
CODE:AA8888888

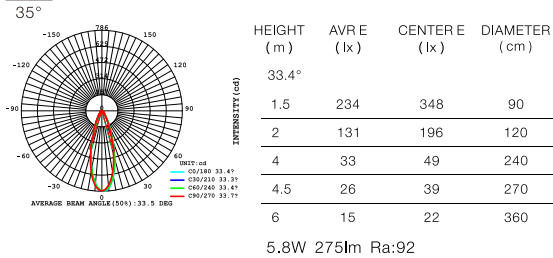


LED 4000K
CODE:AA8888888

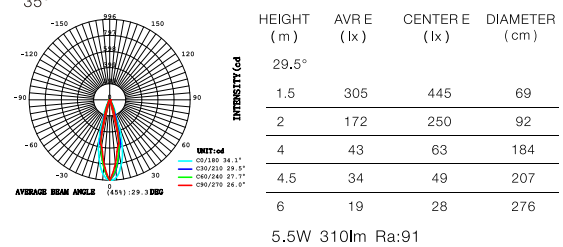


LED 3000K
CODE:AA8888888

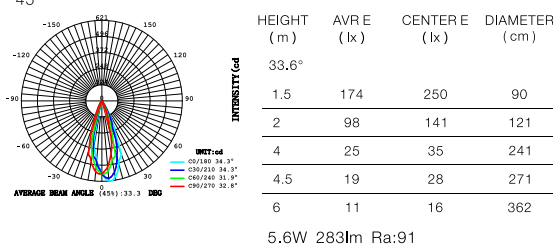

LED 4000K
CODE:AA8888888


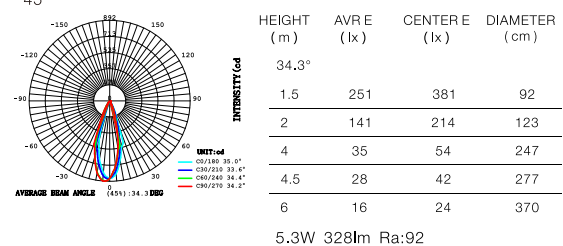


01 6MSF. CIRCLE 10 G2

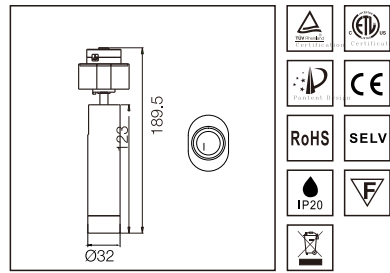


Power	10W
CCT	3000K ● 4000K ●
Voltage	DC24V
Output Lumens	800 lm
CRI	>90
Material	Aluminum
Color	Black / White
Life	30 000 H
Warranty	3 Years

01 6MSF. CIRCLE 10 G2 Brass

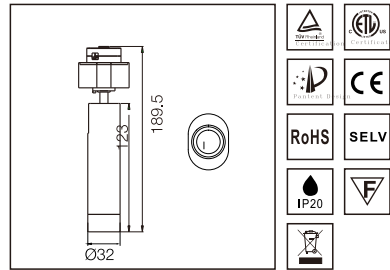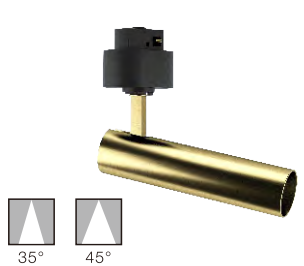


Power	10W
CCT	3000K ● 4000K ●
Voltage	DC24V
Output Lumens	800 lm
CRI	>90
Material	Aluminum
Color	Black / White
Life	30 000 H
Warranty	3 Years

01 6MSF. CIRCLE 10

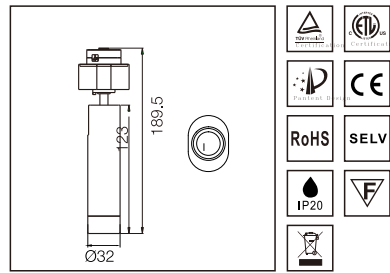

Power	10W
CCT	3000K ● 4000K ●
Voltage	DC24V
Output Lumens	800 lm
CRI	>90
Material	Aluminum
Color	Black
Life	30 000 H
Warranty	3 Years


LED 3000K
CODE:AA8888888

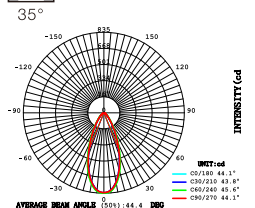

HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
44,1°			
1.5	242	371	122
2	136	209	162
4	34	52	324
4.5	27	41	365
6	15	23	487

9.6W 596lm Ra:93


LED 4000K
CODE:AA8888888

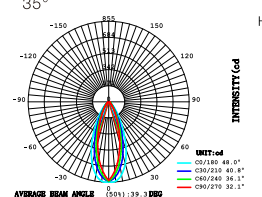

HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
32,8°			
1.5	274	377	88
2	154	212	118
4	39	53	236
4.5	30	42	265
6	17	24	353

9.3W 655lm Ra:93


LED 3000K
CODE:AA8888888

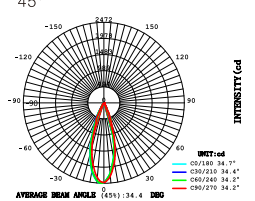

HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
34,5°			
1.5	710	1091	93
2	400	614	124
4	100	153	248
4.5	79	121	279
6	44	68	372

9.8W 609lm Ra:91



LED 4000K
CODE:AA8888888

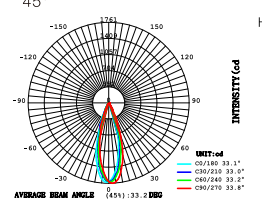

HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
35,3°			
1.5	506	774	90
2	285	746	120
4	71	109	240
4.5	56	86	269
6	32	48	359



9.5W 666lm Ra:92

01 6MSF.CIRCLE 15 G2

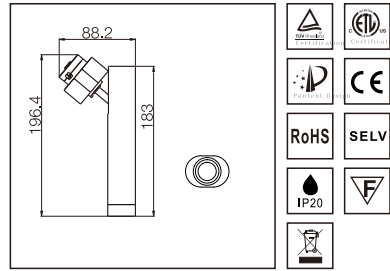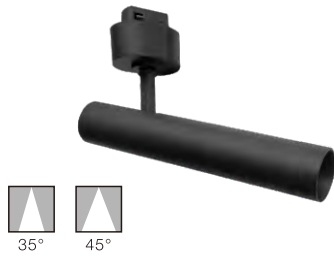



Power	15W
CCT	3000K ● 4000K ●
Voltage	DC24V
Output Lumens	1200 lm
CRI	>90
Material	Aluminum
Color	Black / White
Life	30 000 H
Warranty	3 Years

01 6MSF.CIRCLE 15 G2 Brass

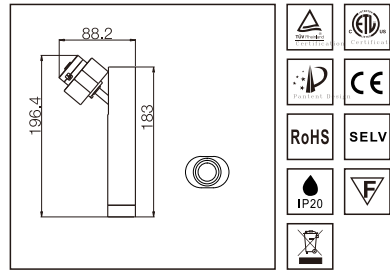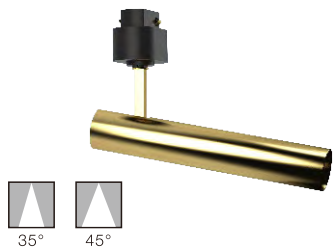


Power	15W
CCT	3000K ● 4000K ●
Voltage	DC24V
Output Lumens	1200 lm
CRI	>90
Material	Aluminum
Color	Black / White
Life	30 000 H
Warranty	3 Years

01 6MSF.CIRCLE 15

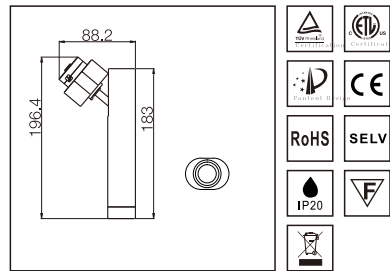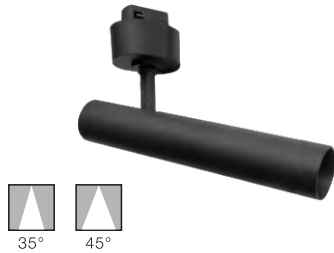


Power	15W
CCT	3000K ● 4000K ●
Voltage	DC24V
Output Lumens	1200 lm
CRI	>90
Material	Aluminum
Color	Black
Life	30 000 H
Warranty	3 Years


LED 3000K
CODE:AA8888888

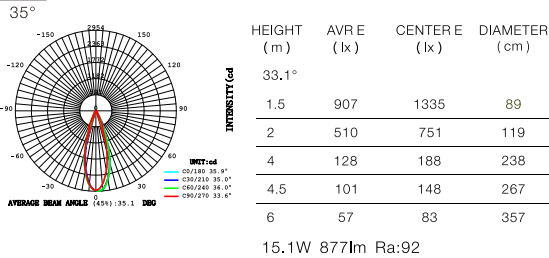


LED 4000K
CODE:AA8888888

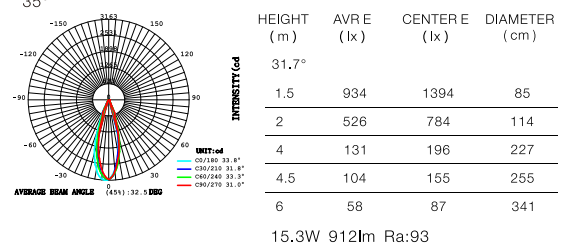


LED 3000K
CODE:AA8888888

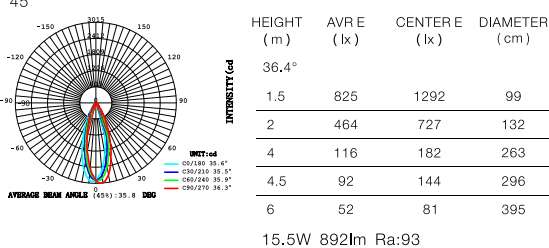

LED 4000K
CODE:AA8888888

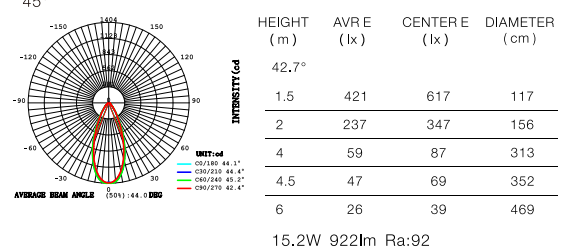


01 6BALL 5

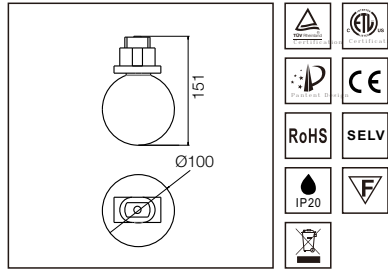

Power	5W
CCT	3000K ● 4000K ●
Voltage	DC24V
Output Lumens	400 lm
CRI	>90
Material	Aluminum+Glass
Color	Black
Life	30 000 H
Warranty	3 Years


LED 3000K
CODE:AA8888888



HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
111.4°			
1.5	9	36	440
2	5	20	587
4	1.3	5	1174
4.5	1	4	1320
6	0.6	2	1760

4.9W 235lm Ra:92

LED 4000K
CODE:AA8888888




HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
122.4°			
1.5	4	16	546
2	2	9	728
4	0.6	2.3	1455
4.5	0.5	1.8	1637
6	0.3	1	2183

5.3W 267lm Ra:91




01 6BALL CABLE 5

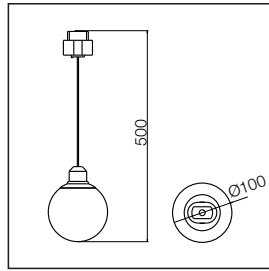

Power	5W
CCT	3000K ● 4000K ●
Voltage	DC24V
Output Lumens	400 lm
CRI	>90
Material	Aluminum+Glass
Color	Black
Life	30 000 H
Warranty	3 Years



LED 3000K
CODE:AA8888888




HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
1.5	9	36	440
2	5	20	587
4	1.3	5	1174
4.5	1	4	1320
6	0.6	2	1760

4.9W 235lm Ra:92



LED 4000K
CODE:AA8888888





HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
1.5	4	16	546
2	2	9	728
4	0.6	2.3	1455
4.5	0.5	1.8	1637
6	0.3	1	2183

5.3W 267lm Ra:91




01 6MSA 5

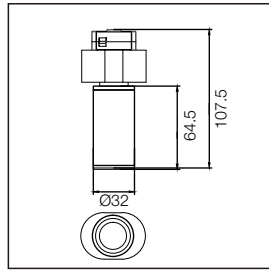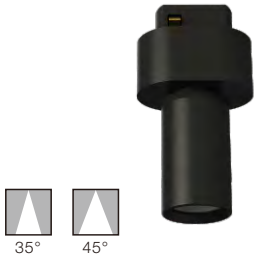


Power	5W
CCT	3000K ● 4000K ●
Voltage	DC24V
Output Lumens	400 lm
CRI	>90
Material	Aluminum
Color	Black
Life	30 000 H
Warranty	3 Years


LED 3000K
CODE:AA8888888

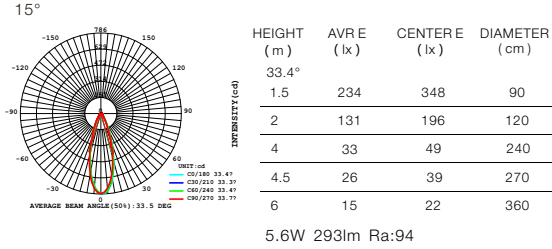


LED 4000K
CODE:AA8888888

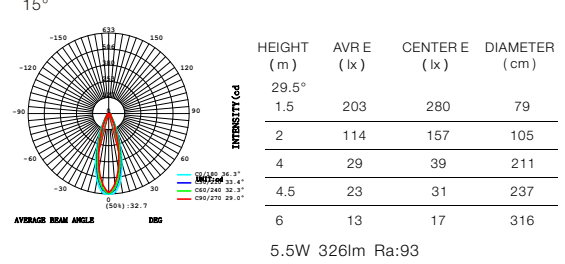


LED 3000K
CODE:AA8888888

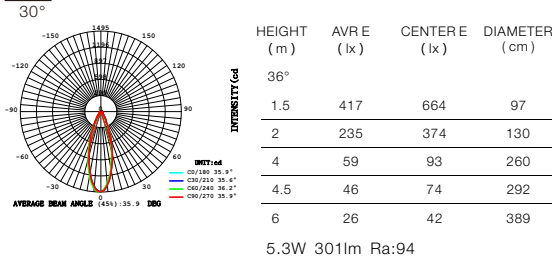

LED 4000K
CODE:AA8888888

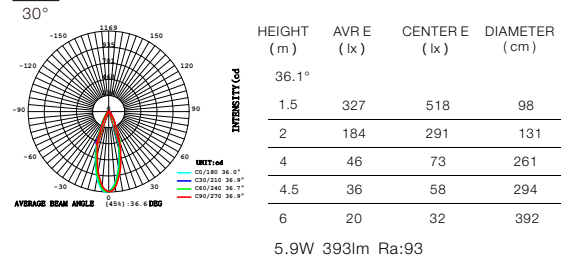


01 6MSF 5

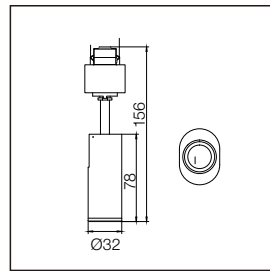

- Power** 5W
- CCT** 3000K ● 4000K ●
- Voltage** DC24V
- Output Lumens** 400 lm
- CRI** >90
- Material** Aluminum
- Color** Black
- Life** 30 000 H
- Warranty** 3 Years

LED 3000K
CODE:AA8888888

15°




HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
33.4°			
1.5	234	348	90
2	131	196	120
4	33	49	240
4.5	26	39	270
6	15	22	360

5.6W 293lm Ra:94

LED 4000K
CODE:AA8888888

15°




HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
29.5°			
1.5	203	280	79
2	114	157	105
4	29	39	211
4.5	23	31	237
6	13	17	316

5.5W 326lm Ra:93

LED 3000K
CODE:AA8888888

30°




HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
36°			
1.5	417	664	97
2	235	374	130
4	59	93	260
4.5	46	74	292
6	26	42	389

5.3W 301lm Ra:94

LED 4000K
CODE:AA8888888

30°





HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
36.1°			
1.5	327	518	98
2	184	291	131
4	46	73	261
4.5	36	58	294
6	20	32	392

5.9W 393lm Ra:93




01 6MSF 10

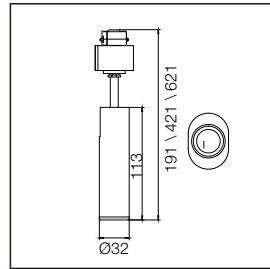

Power	10W
CCT	3000K ● 4000K ●
Voltage	DC24V
Output Lumens	800 lm
CRI	>90
Material	Aluminum
Color	Black
Life	30 000 H
Warranty	3 Years

01 6MSF 10 300/700


LED 3000K
CODE:AA8888888



HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
44.1°			
1.5	242	371	122
2	136	209	162
4	34	52	324
4.5	27	41	365
6	15	23	487

9.6W 686lm Ra:93


LED 4000K
CODE:AA8888888



HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
32.8°			
1.5	274	377	88
2	154	212	118
4	39	53	236
4.5	30	42	265
6	17	24	353

9.3W 723lm Ra:93


LED 3000K
CODE:AA8888888



HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
36.8°			
1.5	680	1073	100
2	382	604	133
4	96	151	266
4.5	76	119	299
6	42	67	399

10.8W 703lm Ra:93

LED 4000K
CODE:AA8888888





HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
35.3°			
1.5	478	765	96
2	269	430	127
4	67	107	255
4.5	53	85	287
6	30	48	382

11W 733lm Ra:92




01 6MSF 15

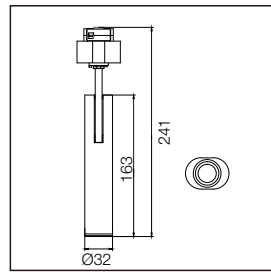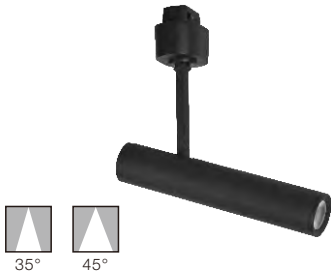

Power	15W
CCT	3000K ● 4000K ●
Voltage	DC24V
Output Lumens	1200 lm
CRI	>90
Material	Aluminum
Color	Black
Life	30 000 H
Warranty	3 Years


LED 3000K CODE:AA8888888



HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
35.3°			
1.5	757	1173	96
2	426	660	127
4	106	165	255
4.5	84	130	287
6	47	73	382

15.4W 821lm Ra:91


LED 4000K CODE:AA8888888



HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
41.7°			
1.5	595	875	114
2	335	492	152
4	84	123	305
4.5	66	97	343
6	37	54	457

14.6W 970lm Ra:90


LED 3000K CODE:AA8888888



HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
36.4°			
1.5	825	1292	99
2	464	727	132
4	116	182	263
4.5	92	144	296
6	52	81	395

15.3W 841lm Ra:93



LED 4000K CODE:AA8888888



HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
42.7°			
1.5	421	617	117
2	237	347	156
4	59	87	313
4.5	47	69	352
6	26	39	469


15.3W 1018lm Ra:93

01 6MSC 10

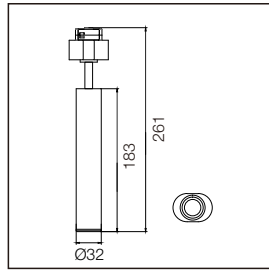

- Power** 10W
- CCT** 3000K ● 4000K ●
- Voltage** DC24V
- Output Lumens** 800 lm
- CRI** >90
- Material** Aluminum
- Color** Black
- Life** 30 000 H
- Warranty** 3 Years


LED 3000K CODE:AA8888888

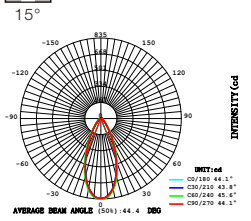

HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
44.1°			
1.5	242	371	122
2	136	209	162
4	34	52	324
4.5	27	41	365
6	15	23	487

9.6W 686lm Ra:93


LED 4000K CODE:AA8888888

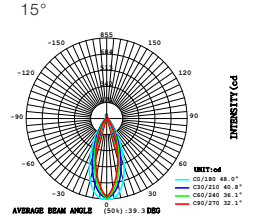

HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
32.8°			
1.5	274	377	88
2	154	212	118
4	39	53	236
4.5	30	42	265
6	17	24	353

9.3W 723lm Ra:93


LED 3000K CODE:AA8888888

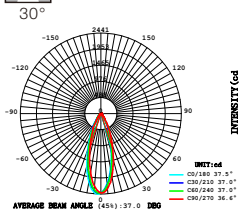

HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
36.8°			
1.5	680	1073	100
2	382	604	133
4	96	151	266
4.5	76	119	299
6	42	67	399

10.8W 703lm Ra:93


LED 4000K CODE:AA8888888

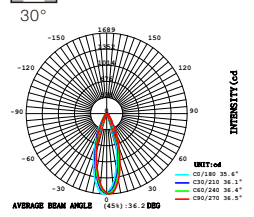

HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
35.3°			
1.5	478	765	96
2	269	430	127
4	67	107	255
4.5	53	85	287
6	30	48	382


11W 733lm Ra:92

01 6MSD 10

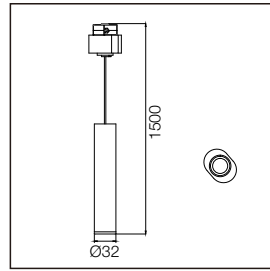

Power	10W
CCT	3000K ● 4000K ●
Voltage	DC24V
Output Lumens	800 lm
CRI	>90
Material	Aluminum
Color	Black
Life	30 000 H
Warranty	3 Years


LED 3000K CODE:AA8888888



HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
44.1°			
1.5	242	371	122
2	136	209	162
4	34	52	324
4.5	27	41	365
6	15	23	487

9.6W 686lm Ra:93


LED 4000K CODE:AA8888888



HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
32.8°			
1.5	274	377	88
2	154	212	118
4	39	53	236
4.5	30	42	265
6	17	24	353

9.3W 723lm Ra:93


LED 3000K CODE:AA8888888



HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
36.8°			
1.5	680	1073	100
2	382	604	133
4	96	151	266
4.5	76	119	299
6	42	67	399

10.8W 703lm Ra:93



LED 4000K CODE:AA8888888



HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
35.3°			
1.5	478	765	96
2	269	430	127
4	67	107	255
4.5	53	85	287
6	30	48	382


11W 733lm Ra:92

01 6MSDA 10

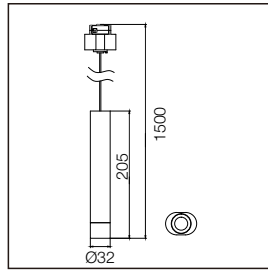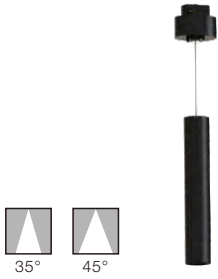

Power	10W
CCT	3000K ● 4000K ●
Voltage	DC24V
Output Lumens	800 lm
CRI	>90
Material	Aluminum
Color	Black
Life	30 000 H
Warranty	3 Years


LED 3000K
CODE:AA8888888



HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
1.5	242	371	122
2	136	209	162
4	34	52	324
4.5	27	41	365
6	15	23	487

9.6W 596lm Ra:93


LED 4000K
CODE:AA8888888



HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
1.5	274	377	88
2	154	212	118
4	39	53	236
4.5	30	42	265
6	17	24	353

9.3W 655lm Ra:93


LED 3000K
CODE:AA8888888



HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
1.5	710	1091	93
2	400	614	124
4	100	153	248
4.5	79	121	279
6	44	68	372

9.8W 609lm Ra:91


LED 4000K
CODE:AA8888888



HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
1.5	506	774	90
2	285	746	120
4	71	109	240
4.5	56	86	269
6	32	48	359

9.5W 666lm Ra:92


01 6MSE 15

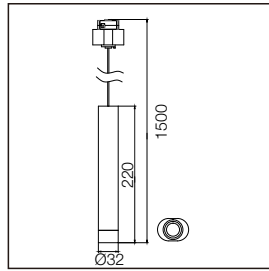

Power	15W
CCT	3000K ● 4000K ●●
Voltage	DC24V
Output Lumens	1200 lm
CRI	>90
Material	Aluminum
Color	Black
Life	30 000 H
Warranty	3 Years



LED 3000K
CODE:AA8888888




HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
1.5	7	71	963
2	4	40	1284
4	1	10	2568
4.5	0.8	8	2890
6	0.5	4	3853

15.9W 616lm Ra:92




LED 4000K
CODE:AA8888888



HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
1.5	14	83	709
2	8	47	945
4	1.9	12	1890
4.5	1.5	9	2126
6	0.9	5	2835

16W 650lm Ra:93


01 6ME cone

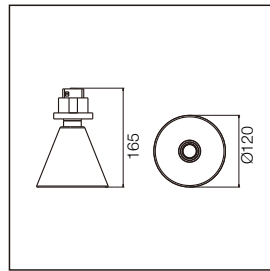

Power	5W
CCT	3000K ● 4000K ●●
Voltage	DC24V
Output Lumens	400 lm
CRI	>90
Material	Aluminum
Color	Copper
Life	30 000 H
Warranty	3 Years



LED 3000K
CODE:AA8888888




HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
26.1°			
1.5	21	41	70
2	12	23	93
4	3	6	186
4.5	2	5	209
6	1	3	278

5.1W 246lm Ra:91



LED 4000K
CODE:AA8888888




HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
29.1°			
1.5	25	42	73
2	14	24	97
4	4	6	194
4.5	3	5	219
6	2	3	292

5.1W 266lm Ra:92




01 6ME cone cable

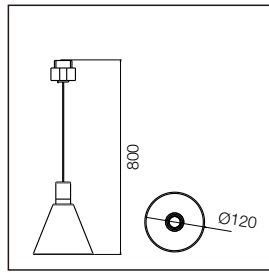

Power	5W
CCT	3000K ● 4000K ●
Voltage	DC24V
Output Lumens	400 lm
CRI	>90
Material	Aluminum
Color	Copper
Life	30 000 H
Warranty	3 Years



LED 3000K
CODE:AA8888888




HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
26.1°			
1.5	21	41	70
2	12	23	93
4	3	6	186
4.5	2	5	209
6	1	3	278

5.1W 246lm Ra:91



LED 4000K
CODE:AA8888888




HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
29.1°			
1.5	25	42	73
2	14	24	97
4	4	6	194
4.5	3	5	219
6	2	3	292

5.1W 266lm Ra:92


Product information

01 6ME.cover

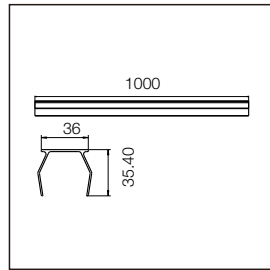


Material PVC
Color Blac
Remark Used to cover the blank space of the track and to protect the interior when the track is concealedk

Wireless switch panel

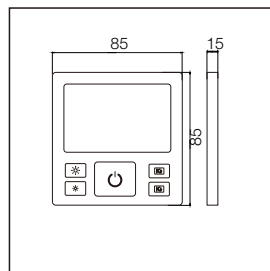


Material Plastic
Color White
Remark Wireless switch panel used for dimming or setting up scenes

SMART DIM



Power Max. 100W
Material Plastic
Color White
Remark Intelligent driver


01 6 ME Connector Kit

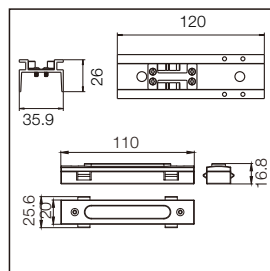

Material Aluminum
Color Black
Remark Used for connection and conduction between two tracks


Product information

01 6MEN

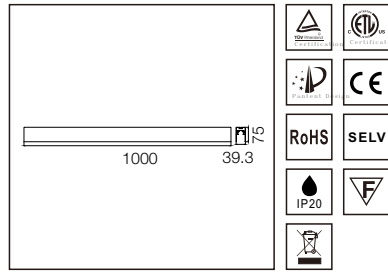


Material Aluminum
Color Black
Remark Magnetic track for surface mounting and suspend

01 6MECN

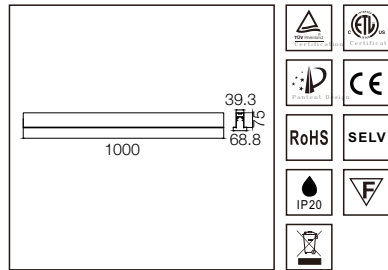


Material Aluminum
Color Black
Remark Magnetic track for recessed

Cap 01 6ME

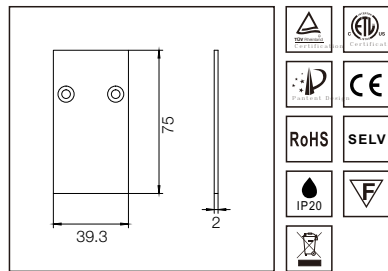

Material Aluminum
Color Black
Remark For the end of the magnetic track


01 6ME Feeder CABLE

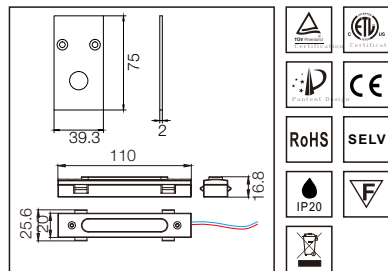

Material Aluminum
Color Black
Remark Used for magnetic track start and conduction


Product information

0126MEN corner H

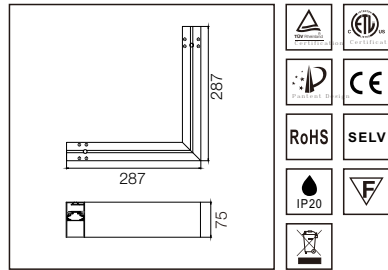


Material Aluminum
Color Black
Remark Magnetic track for surface mounting and suspend the plane 90° Corner

01 6MEN corner V

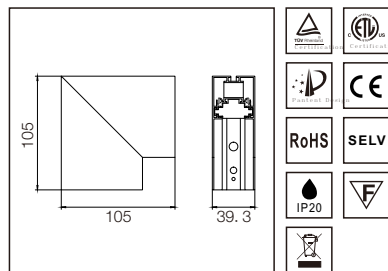


Material Aluminum
Color Black
Remark Magnetic track for surface mounting and suspend the erect 90° Corner

01 6MECN corner H

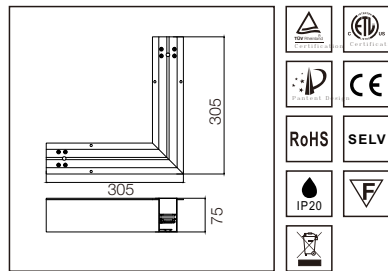

Material Aluminum
Color Black
Remark Magnetic track for recessed the plane 90° Corner


01 6MECN corner V

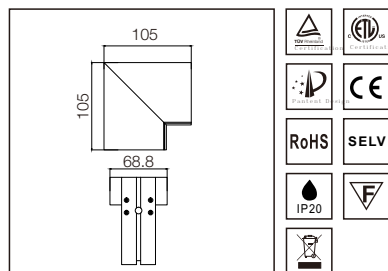

Material Aluminum
Color Black
Remark Magnetic track for recessed the erect 90° Corner


Product information

01 6MELN

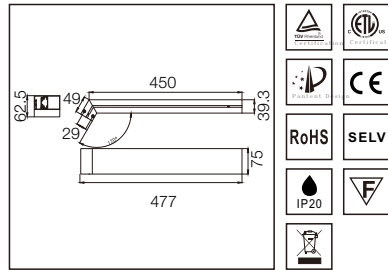


Material Aluminum
Color Black
Remark Magnetic track for surface mounting and suspend the plane 120° Corner

01 6MEN Corner V 60°

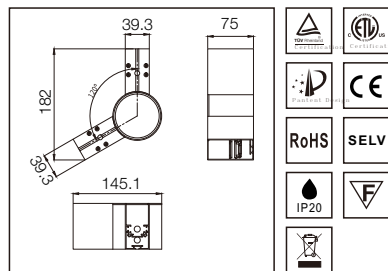


Material Aluminum
Color Black
Remark Magnetic track for surface mounting and suspend the plane 120° Corner

01 6MEN Corner 3V 60°

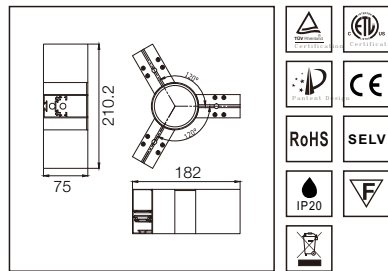

Material Aluminum
Color Black
Remark Magnetic track for surface mounting and suspend the plane 3x120° Corner


01 6ME feeder

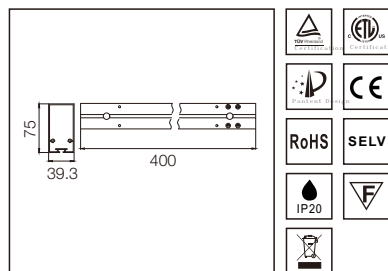

Material Aluminum
Color Black
Remark Driver box without driver for magnetic track surface mounting and suspend


Product information

01 6ME Feeder Power

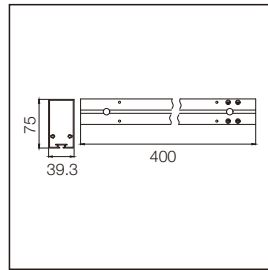


Power Max. 180W
Material Aluminum
Color Black
Remark Driver box with driver for magnetic track surface mounting and suspend

S-mounted

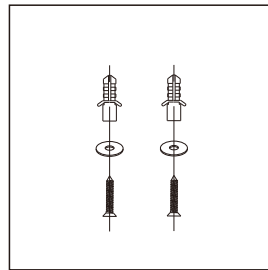


Material Iron
Color Chrome
Remark For magnetic track surface mounting accessories

Cable 70



Material Aluminum
Color Black
Remark For magnetic track suspend accessories

Pipe kit

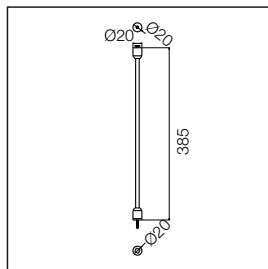

Material Aluminum
Color Black
Remark For magnetic track suspend accessories

01 6ME.cover application

