



# Pantrack LED track light

For retail & supermarket lighting

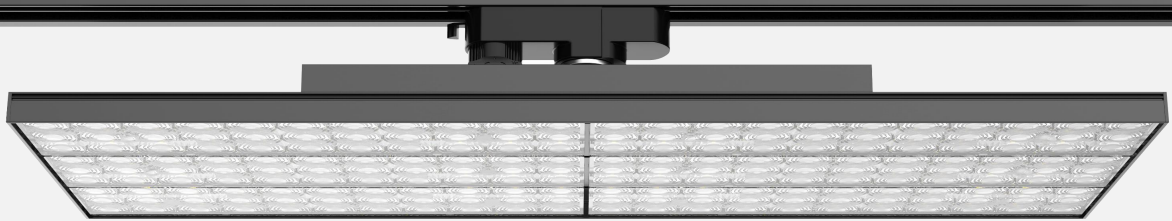

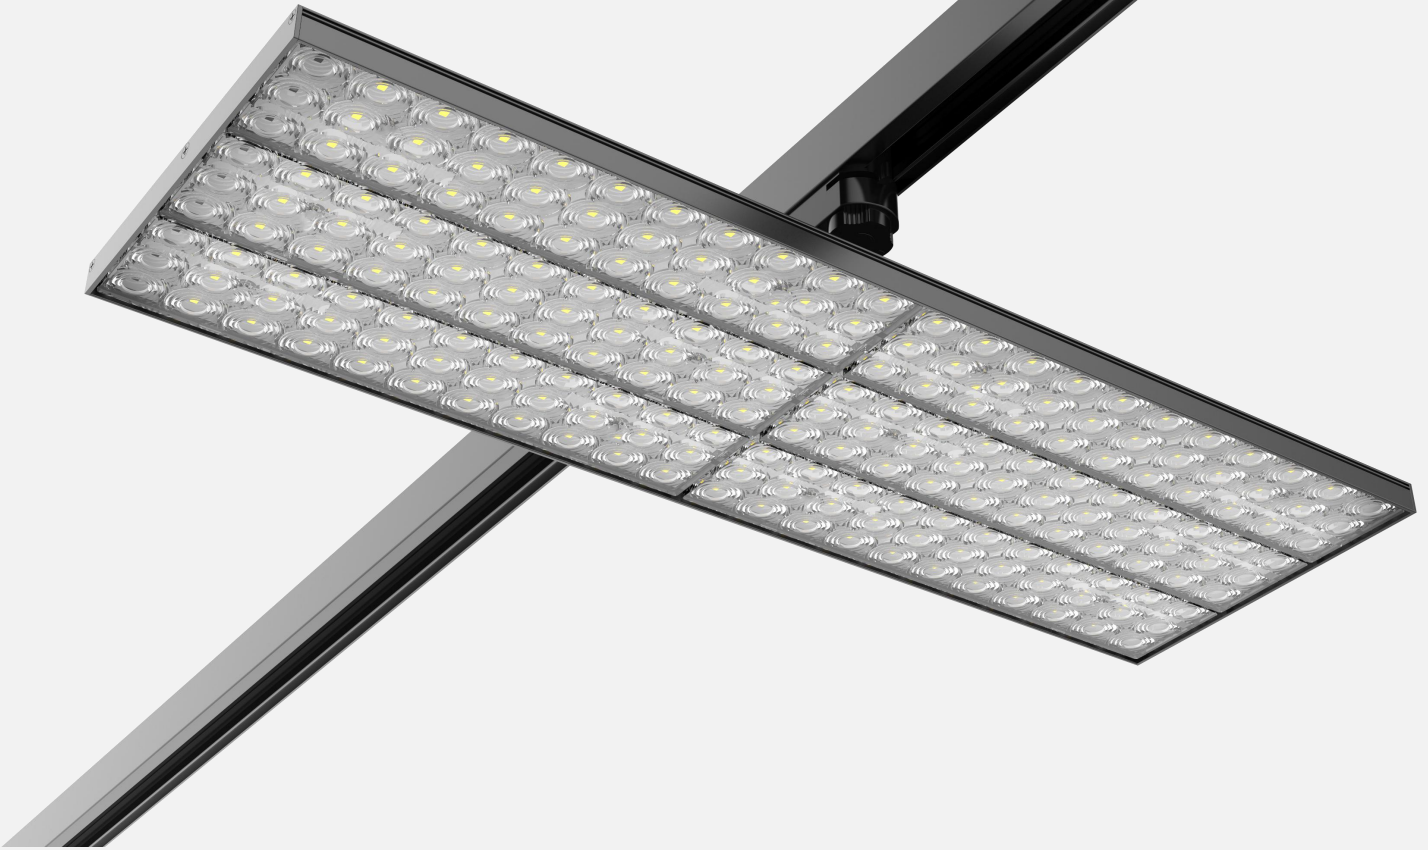

## Description

The Pantrack series is highly versatile: different lens optics (30° , 60° , 90° , 110° , double asymmetric and single asymmetric is optional) combined and the track-mounted variant can be rotated. It can meet the needs in conventional general lighting, also, the Pantrack is suitable for places with special light distribution requirements, such as shelf and aisles lighting.

The Pantrack series is simple and compact, suitable for European standard three-circuit track system, which is convenient for group control management. At the same time, it has multiple smart control option, such as DALI dimming, 1-10V dimming, 2.4G wireless dimming, etc.




## Key Features


Universal track adaptor design, compatible with multiple-brands European 3 circuits track.

A variety of light distribution angles are available to meet different application needs.


The luminaire can be rotated through  $\pm 350^\circ$ .




30°




60°




90°



110°

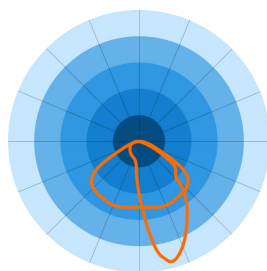

Single asymmetric 15°

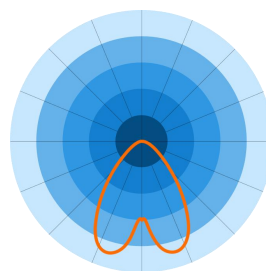

Double asymmetric 20°

# Data Sheet



Available in black and white



## Order Information

Item No.	Total Power	Luminous Flux	Flux Efficiency	Warranty
LPA05-040	40W	5900LM	145LM/W	5 Years
LPA05-060	60W	8400LM	140LM/W	5 Years
LPA05-080	75W	10125LM	135LM/W	5 Years

## Other Information

<b>Input Voltage</b>	AC220-240V	<b>Power Frequency</b>	50/60 HZ
<b>CCT</b>	3000K, 4000K, 5000K	<b>Operating Temperature Range</b>	-40°~+50°
<b>Ra</b>	>80, >90	<b>Operating Humidity Range</b>	15-90%RH
<b>Protection Level</b>	IP20	<b>Net weight</b>	2.5KG(@80W)
<b>Finish</b>	Luminaire: Black, White; Track: Black, White	<b>Rotatable angle</b>	Rotate through ±350°
<b>Light Distribution</b>	30°, 60°, 90°, 110°, single asymmetric 15°, Double asymmetric 25°		
<b>Dimension(L*W*H)</b>	580mm×190mm×116mm		

## Dimension Diagram

